


## START

Mixed amplifier AMP-200


### Characteristic

1. Has 3 groups microphones input, 2 groups assistance input
2. 70V, 100V rated voltage output, 4-16 ohm rated impedance output
4. Output short-circuit, over-heat, over-load protection.

### Front panel

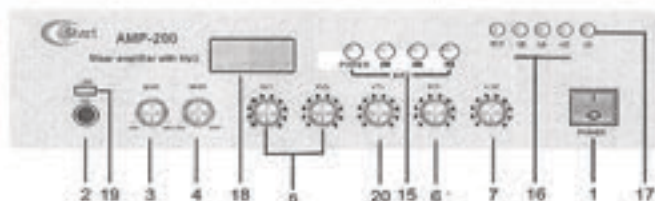

### Rear panel

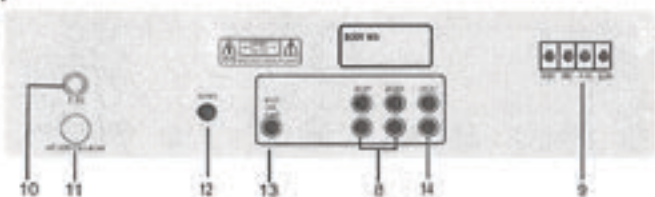

- |                             |                                   |
|-----------------------------|-----------------------------------|
| 1. power source switch      | 11. power source line             |
| 2. MIC 1 input              | 12. Mute adjusted                 |
| 3. bass adjusted            | 13. MIC 2,3 input                 |
| 4. treble adjusted          | 14. Line output                   |
| 5. MIC volume controlled    | 15. MP3 play press button         |
| 6. Line 1 volume controlled | 16. Signal indication light       |
| 7. Line 2 volume control    | 17. power source indication light |
| 8. Line 1,2 input           | 18. Digital display               |
| 9. Rated voltage output     | 19. USB insert jack               |
| 10. Fuse faucet             | 20. MP3 volume control            |

## START

Mixed amplifier AMP-200

### Specification

Model	AMP-200
Rated output power	200W
Output way	4-16ohm,70V,100V rated voltage output
Input	Mic1:2:600ohm2.0-4.0mv,AUX1:2:15k ohm775mv unbalance
Frequency	50Hz-15KHz (±3dB)
Distortion	below 0.1% at1,2 and 3:66db.AUX1 and 2:70db
S/N	microphone1, 2and3: 66dB.AUX1and2: 78dB
Volume adjusted	bass:±10db at 100Hztreble:±10db at 15KHz
Power source	AC 220v/50Hz
Power consumption	100W

### Mp3 press button instruction

1. Button "power" is Mp3 power source switch
2. Button "⏮" is last music
3. Button "⏭" is next music
4. Button "⏪" is "play" and "pause" button of the Mp3