

6MI90 MID FREQUENCY TRANSDUCER MI100 Series

KEY FEATURES

- High power handling (125 W_{AES})
- Good sensitivy (96 dB)
- Aluminium basket
- 1,5" copper voice coil
- Low harmonic distortion
- Designed for mid frequency applications
- Optimal for high quality sound reinforcement systems

TECHNICAL SPECIFICATIONS


Nominal diameter Rated impedance	165 mm	6,5 in 8 Ω
Minimum impedance		6,3 Ω
Power capacity*	125 W _{AES}	
Program power	250 W	
Sensitivity	96 dB @ 1W @ Z _N	
Frequency range	140 - 8.000 Hz	
Voice coil diameter	38,1 mm	1,5 in
BI factor	1	1,3 N/A
Moving mass	0	,011 kg
Voice coil length		7,5 mm
Air gap height		6 mm

THIELE-SMALL PARAMETERS**

Resonant frequency, f _s D.C. Voice coil resistance, R _e Mechanical Quality Factor, Q _{ms} Electrical Quality Factor, Q _{es}	134 Hz 5,7 Ω 8,4 0,44
Total Quality Factor, Q _{ts}	0,42
Equivalent Air Volume to C _{ms} , V _{as}	3,35 I
Mechanical Compliance, C _{ms}	121 μm / N
Mechanical Resistance, R _{ms}	1,16 kg / s
Efficiency, η ₀	1,75 %
Effective Surface Area, S _d	0,014 m ²
Maximum Displacement, X _{max} ***	2,5 mm
Displacement Volume, V _d	35 cm ³
Voice Coil Inductance, Le	0,4 mH



DIMENSION DRAWINGS

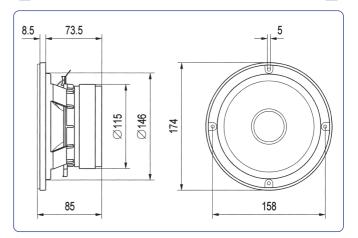

MOUNTING INFORMATION

Overall diameter	174 mm	6,85 in
Bolt circle diameter	158 mm	6,22 in
Baffle cutout diameter:		
- Front mount	146 mm	5,75 in
Depth	85 mm	3,35 in
Net weight	2,2 kg	4,84 lb
Shipping weight	2,3 kg	5,05 lb

Notes:

 * The power capaticty is determined according to AES2-1984 (r2003) standard. Program power is defined as the transducer's ability to handle normal music program material.


** T-S parameters are measured after an exercise period using a preconditioning power test. The measurements are carried out with a velocity-current laser transducer and will reflect the long term parameters (once the loudspeaker has been working for a short period of time).

*** The X_{max} is calculated as (L_{vc} - H_{ag})/2 + (H_{ag}/3,5), where L_{vc} is the voice coil length and H_{ag} is the air gap height.



www.beyma.com

6MI90 MID FREQUENCY TRANSDUCER MI100 Series

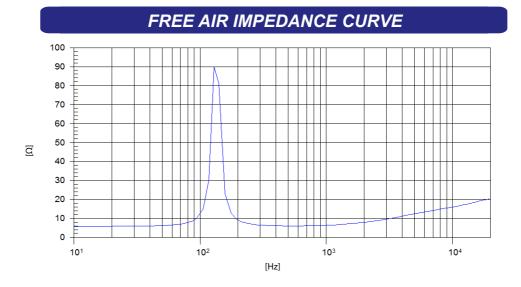

FREQUENCY RESPONSE AND DISTORTION 120 110 100 90 80 [dB] 70 60 50 40 Н2 30 H3 20 10² 10³ 104 [Hz]

Note: On axis frequency response measured with loudspeaker standing on infinite baffle in anechoic chamber, 1W @ 1m

beyma JJ

Polígono Industrial Moncada II • C/. Pont Sec, 1c • 46113 MONCADA - Valencia (Spain) • Tel.: (34) 96 130 13 75 • Fax: (34) 96 130 15 07 • http://www.beyma.com • E-mail: beyma@beyma.com •

Ŕ