

# SPOT 300

PROJECTORS


SPOT 300



## FEATURES

- Variable beam projector, from spot to flood
- Focus adjustment with sliding movement
- Available with PC or Fresnel lens
- Sliding top cover for lamp replacement
- Aluminium and steel body with cooling fins

- LP40 300W
- 230V  
50/60 Hz
- Gy 9.5  
LcL 46.5 mm

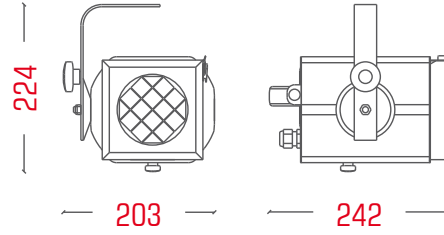

SPOT 300 PC 2,3

SPOT 300 FR 2,0

## MODELS

SPOT 300 PC (Cod. TE001.PC.30)  
Anti-halo Ø 80mm lens • Black colour

SPOT 300 FRESNEL (Cod. TE001.FR.30)  
Fresnel Ø 90mm lens • Black colour

## TECHNICAL

- Lens diameter 80/90mm
- Aluminium reflector diameter 60mm
- Gel filter cut size 130x130mm
- Reverse yoke for stand mounting
- Single side knob tilt-lock
- 1 meter cable with cable clamp

## ACCESSORY

SPOT 300

- INCLUDED  
TE001.FF
- TE001.BARN

## ADMISSIBLE LAMPS

300W: CP81 3200K 180hrs  
300W: M38 2900K 2000hrs

## PHOTOMETRIC

SPOT 300

### TEST AT 230V WITH 300W LAMP - PC LENS

11°	DIST	2.5	5	7.5	10	12.5	15
	LUX	3200	800	356	200	128	89
	Ø(m)	0.48	0.96	1.44	1.92	2.40	2.88

54°	DIST	2.5	5	7.5	10	12.5	15
	LUX	720	180	80	45	29	20
	Ø(m)	2.50	4.99	7.49	9.98	12.4	14.9

### TEST AT 230V WITH 300W LAMP - FRESNEL LENS

9°	DIST	2.5	5	7.5	10	12.5	15
	LUX	3520	880	391	220	141	98
	Ø(m)	0.40	0.79	1.19	1.58	1.98	2.37

53°	DIST	2.5	5	7.5	10	12.5	15
	LUX	780	195	87	49	31	22
	Ø(m)	2.47	4.93	7.40	9.86	12.3	14.7

# SPOT 500

PROJECTORS


SPOT 500



## FEATURES

- Variable beam projector, from spot to flood
- Focus adjustment with sliding movement
- Available with PC or Fresnel lens
- Sliding top cover for lamp replacement
- Aluminium and steel body with cooling fins

- LP40 300W  
LP47 500W
- 230V  
50/60 Hz
- Gy 9.5  
LcL 46.5 mm

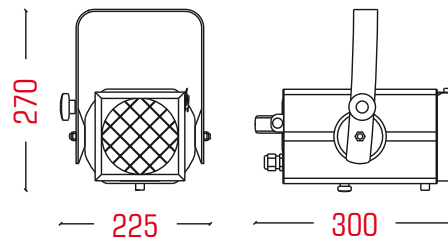

SPOT 500 PC 3,2

SPOT 500 FR 3,0

## MODELS

SPOT 500 PC (Cod. TE002.PC.50)  
Anti-halo Ø 120mm lens • Black colour

SPOT 500 FRESNEL (Cod. TE002.FR.50)  
Fresnel Ø 120mm lens • Black colour

## TECHNICAL

- Lens diameter 120mm
- Aluminium reflector diameter 60mm
- Gel filter cut size 130x130mm
- Reverse yoke for stand mounting
- Single side knob tilt-lock
- 1 meter cable with cable clamp

## ACCESSORY

SPOT 500

- INCLUDED  
TE001.FF
- TE001.BARN

## ADMISSIBLE LAMPS

300W: CP81 3200K 180hrs  
300W: M38 2900K 2000hrs  
500W: T18 3050K 400hrs  
500W: CP82 3200K 180hrs

## PHOTOMETRIC

SPOT 500

### TEST AT 230V WITH 500W LAMP - PC LENS

11°	DIST	2.5	5	7.5	10	12.5	15
	LUX	4800	1200	533	300	192	133
	Ø(m)	0.48	0.96	1.44	1.92	2.40	2.88

44°	DIST	2.5	5	7.5	10	12.5	15
	LUX	960	240	107	60	38	27
	Ø(m)	2.02	4.04	6.06	8.08	10.1	12.1

### TEST AT 230V WITH 500W LAMP - FRESNEL LENS

10°	DIST	2.5	5	7.5	10	12.5	15
	LUX	5600	1400	622	350	224	156
	Ø(m)	0.44	0.88	1.32	1.76	2.20	2.64

42°	DIST	2.5	5	7.5	10	12.5	15
	LUX	1400	350	156	88	56	39
	Ø(m)	1.93	3.85	5.78	7.70	9.63	11.5