

SPOT 1000 PRO

PROJECTORS

SPOT 1000 PRO



FEATURES

- Variable beam projector, from spot to flood
- Screw-focus adjustment, front and rear control
- Available with PC or Fresnel lens
- Sliding top cover for lamp replacement
- Aluminium and steel body with cooling fins

- LP42 650W
LP43 1000W
- 230V
50/60 Hz
- Gx 9.5
LcL 55 mm


MODELS

SPOT 1000 PRO PC (Cod. TE005.PC.100)
Anti-halo Ø 150mm lens • Black colour

SPOT 1000 PRO FRESNEL
(Cod. TE005.FR.100)
Fresnel Ø 150mm lens • Black colour

TECHNICAL

- Lens diameter 150mm
- Aluminium reflector diameter 100mm
- Gel filter cut size 180x180mm
- Reverse yoke for stand mounting
- 1 meter cable with cable clamp
- Single side knob tilt-lock

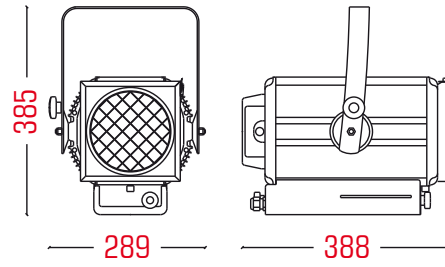


SPOT 1000 PRO PC **Kg** 6,8

SPOT 1000 PRO FR **Kg** 6,5

ACCESSORY

SPOT 1000 PRO



ADMISSIBLE LAMPS

- 650W: T21 3050K 900hrs
- 650W: CP67 3200K 400hrs
- 1000W: T19 3050K 750hrs
- 1000W: CP70 3200K 200hrs

PHOTOMETRIC

SPOT 1000 PRO

TEST AT 230V WITH 1000W LAMP - PC LENS

| 11° | DIST | 2.5 | 5 | 7.5 | 10 | 12.5 | 15 |
|-----|------|-------|------|------|------|------|------|
| | LUX | 13850 | 3460 | 1538 | 865 | 554 | 384 |
| | Ø(m) | 0.48 | 0.96 | 1.44 | 1.92 | 2.40 | 2.88 |

| 57° | DIST | 2.5 | 5 | 7.5 | 10 | 12.5 | 15 |
|-----|------|------|------|------|------|------|------|
| | LUX | 1720 | 430 | 191 | 108 | 69 | 48 |
| | Ø(m) | 2.39 | 4.77 | 7.16 | 9.54 | 11.9 | 14.3 |

TEST AT 230V WITH 1000W LAMP - FRESNEL LENS

| 11° | DIST | 2.5 | 5 | 7.5 | 10 | 12.5 | 15 |
|-----|------|-------|------|------|------|------|------|
| | LUX | 14080 | 3520 | 1564 | 880 | 563 | 391 |
| | Ø(m) | 0.48 | 0.96 | 1.44 | 1.92 | 2.40 | 2.88 |

| 50° | DIST | 2.5 | 5 | 7.5 | 10 | 12.5 | 15 |
|-----|------|------|------|------|------|-------|------|
| | LUX | 2200 | 550 | 244 | 138 | 88 | 61 |
| | Ø(m) | 2.33 | 4.66 | 6.99 | 9.32 | 11.65 | 13.9 |

SPOT 1200 PRO

PROJECTORS

SPOT 1200 PRO



FEATURES

- Variable beam projector, from spot to flood
- Screw-focus adjustment, front and rear control
- Available with PC or Fresnel lens
- Sliding top cover for lamp replacement
- Aluminium and steel body with cooling fins

- LP53 1200W
- 230V
50/60 Hz
- Gx 9.5
LcL 67 mm


MODELS

SPOT 1200 PRO PC (Cod. TE006.PC.120P)
Anti-halo Ø 150mm lens • Black colour

SPOT 1200 PRO FRESNEL
(Cod. TE006.FR.120P)
Fresnel Ø 150mm lens • Black colour

TECHNICAL

- Lens diameter 150mm
- Aluminium reflector diameter 100mm
- Gel filter cut size 180x180mm
- Reverse yoke for stand mounting
- 1 meter cable with cable clamp
- Single side knob tilt-lock

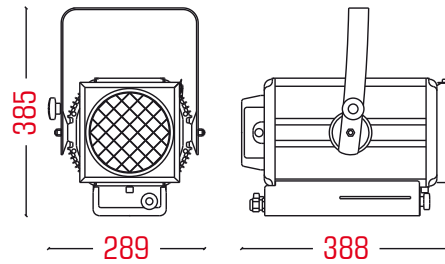


SPOT 1200 PRO PC **Kg** 6,8

SPOT 1200 PRO FR **Kg** 6,5

ACCESSORY

SPOT 1200 PRO



ADMISSIBLE LAMPS

- 1200W: T29 3050K 480hrs
- 1200W: CP90 3200K 200hrs

PHOTOMETRIC

SPOT 1200 PRO

TEST AT 230V WITH 1200W LAMP - PC LENS

| 11° | DIST | 5 | 10 | 12.5 | 15 | 20 | 25 |
|-----|------|------|------|------|------|------|------|
| | LUX | 4100 | 1025 | 656 | 456 | 256 | 164 |
| | Ø(m) | 0.96 | 1.92 | 2.40 | 2.88 | 3.36 | 4.80 |

| 57° | DIST | 5 | 10 | 12.5 | 15 | 20 | 25 |
|-----|------|------|------|------|------|------|------|
| | LUX | 510 | 128 | 82 | 57 | 32 | 20 |
| | Ø(m) | 5.43 | 10.8 | 13.5 | 16.3 | 21.7 | 27.1 |

TEST AT 230V WITH 1200W LAMP - FRESNEL LENS

| 10° | DIST | 5 | 10 | 12.5 | 15 | 20 | 25 |
|-----|------|------|------|------|------|------|------|
| | LUX | 4480 | 1120 | 717 | 498 | 280 | 179 |
| | Ø(m) | 0.88 | 1.75 | 2.19 | 2.63 | 3.50 | 4.38 |

| 53° | DIST | 5 | 10 | 12.5 | 15 | 20 | 25 |
|-----|------|------|------|------|------|------|------|
| | LUX | 600 | 150 | 96 | 67 | 49 | 38 |
| | Ø(m) | 4.99 | 9.98 | 12.4 | 14.9 | 19.9 | 24.8 |