

FOLLOWSPOT 2000 D

PROJECTORS


FOLLOWSPOT 2000 D



FEATURES

- High definition followspot projector
- Double condenser optics
- Linear zoom 8° to 14°
- Typical use from 12 to 30m distance
- Aluminium and steel body with cooling fins

- LP44 2000W
- 230V
50/60 Hz
- G9 16
Lcd. 70 mm

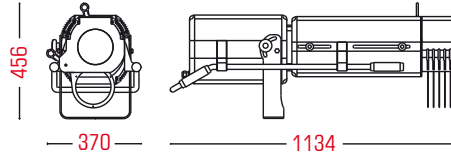

FOLLOWSPOT 2000 D 27

MODELS

FOLLOWSPOT 2000D (Cod. TE026.HAL.2000)
• Black colour

TECHNICAL

- Front lenses diameter 150mm
- Central slot for gobo holder or iris diaphragm
- Iris diaphragm is included
- Colour changer is included
- Lamp hours counter
- Mechanical dimmer 0% to 100%

ACCESSORY

- INCLUDED
TE84
- TE65
- 86 mm
B size
-60 mm

FOLLOWSPOT 2000 D

ADMISSIBLE LAMPS

2000W: CP43 3200K 400hrs
2000W: CP72 3200K 480hrs

PHOTOMETRIC

FOLLOWSPOT 2000 D

TEST AT 230V WITH 2000W LAMP

8°	DIST	5	10	15	20	25	30
	LUX	12870	3218	1430	804	515	358
	Ø(m)	0.70	1.40	2.10	2.80	3.50	4.20

14°	DIST	5	10	15	20	25	30
	LUX	5400	1350	600	338	216	150
	Ø(m)	1.23	2.45	3.68	4.91	6.13	7.36