



12PLB76

LF Drivers - 12.0 Inches

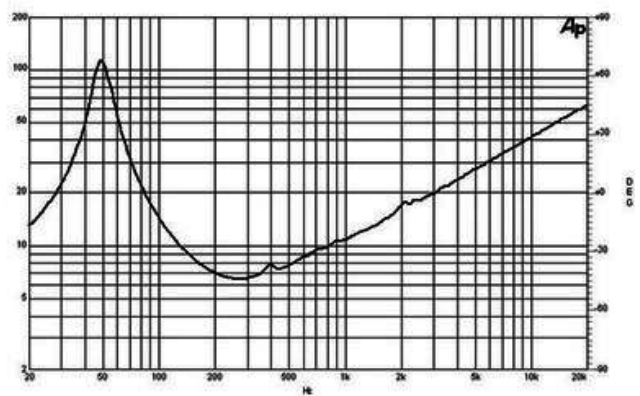

- 700 W continuous program power capacity
- 76 mm (3 in) aluminium voice coil
- 50 - 2000 Hz response
- 98.5 dB sensitivity

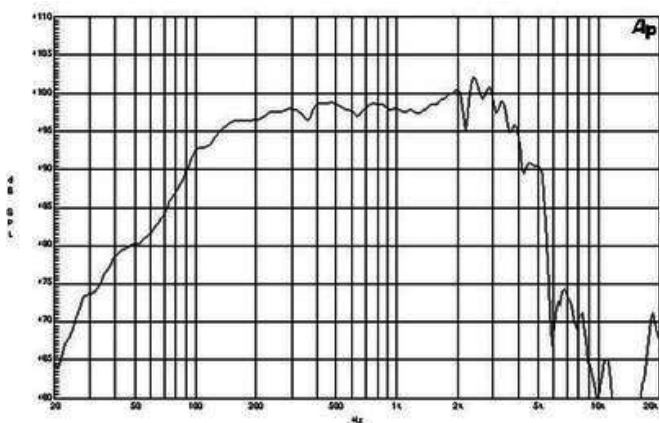

12PLB76

LF Drivers- 12.0 Inches

SPECIFICATIONS

Nominal diameter	320 mm (12.0 in)
Nominal impedance	8 Ω
Minimum impedance	6.4 Ω
Nominal power handling ¹	350 W
Continuous power handling ²	700 W
Sensitivity (1W1m) ³	99.0 dB
Frequency range	50 - 2000 Hz
Voice coil diameter	76 mm (3.0 in)
Winding material	Aluminium
Former material	Glass Fibre
Winding depth	16 mm (0.62 in)
Magnetic gap depth	11 mm (0.4 in)
Flux density	1.05 T

MOUNTING AND SHIPPING INFO

Overall diameter	316 mm (12.4 in)
Bolt circle diameter	296 mm (11.6 in)
Baffle cutout diameter	282.0 mm (11.1 in)
Depth	136 mm (5.35 in)
Flange and gasket thickness	16 mm (0.62 in)
Air volume occupied by driver	3.3 dm ³ (0.12 ft ³)
Net weight	7.4 kg (16.4 lb)
Shipping weight	8.2 kg (18.0 lb)
Shipping box	340x340x170 mm (13.4x13.4x6.7 in)

DESIGN

Surround shape	Double Roll
Cone shape	Exponential
Magnet material	Ferrite
Spider	Single
Pole design	T-Pole
Woofers cone treatment	WP Waterproof Front Side (upon request)
Recommended enclosure	42.0 dm ³ (1.48 ft ³)
Recommended tuning	65 Hz

SERVICE KIT

RCK12PLB768

PARAMETERS

Fs	50 Hz
Re	5.0 Ω
Qes	0.24
Qms	5.3
Qts	0.23
Vas	75.0 dm ³ (2.6 ft ³)
Sd	522.0 cm ² (80.9 in ²)
η_0	3.8 %
Xmax	5.0 mm
Xvar	7.0 mm
Mms	51 g
Bl	18.6 Txm
Le	1.2 mH
EBP	208 Hz

1. 2 hours test made with continuous pink noise signal (6 dB crest factor) within the range Fs-10Fs. Power calculated on rated minimum impedance. Loudspeaker in free air.
2. Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
3. Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.

B&C Speakers s.p.a.

Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) - ITALY
Tel. +39 055 65721 - Fax +39 055 6572312
mail@bcspeakers.com