



15PL100

LF Drivers - 15.0 Inches

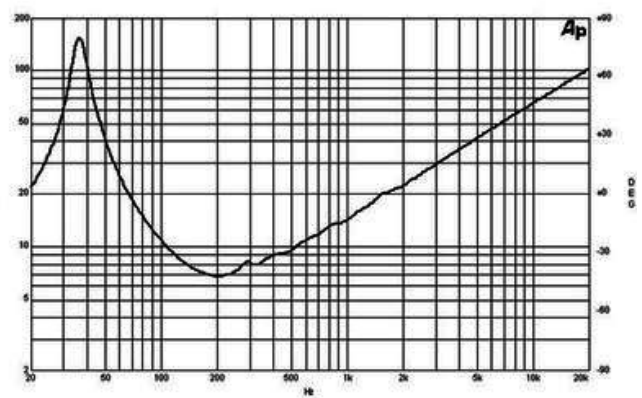

- 1400 W continuous program power capacity
- 100 mm (4 in) copper voice coil
- 35 - 2000 Hz response
- 97 dB sensitivity
- Double silicone spider with optimized compliance

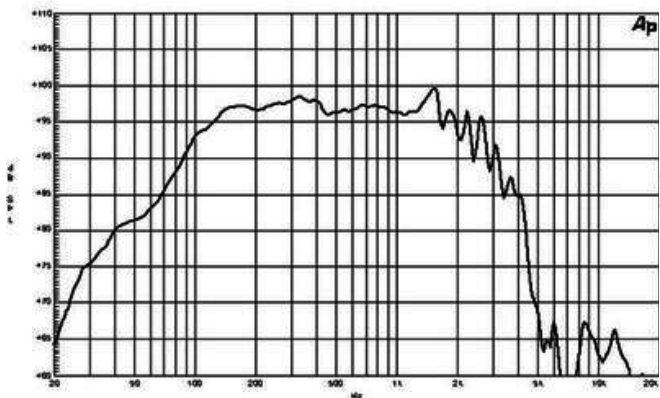

15PL100

LF Drivers- 15.0 Inches

SPECIFICATIONS

Nominal diameter	380 mm (15.0 in)
Nominal impedance	8 Ω
Minimum impedance	6.8 Ω
Nominal power handling ¹	700 W
Continuous power handling ²	1400 W
Sensitivity (1W/1m) ³	97.0 dB
Frequency range	35 - 2000 Hz
Voice coil diameter	100 mm (4.0 in)
Winding material	Copper
Former material	Glass Fibre
Winding depth	21 mm (0.83 in)
Magnetic gap depth	11 mm (0.4 in)
Flux density	1.15 T

MOUNTING AND SHIPPING INFO

Overall diameter	393 mm (15.5 in)
Bolt circle diameter	374 mm (14.7 in)
Baffle cutout diameter	354.0 mm (13.9 in)
Depth	173 mm (6.8 in)
Flange and gasket thickness	16 mm (0.62 in)
Air volume occupied by driver	0.0 dm ³ (0.0 ft ³)
Net weight	11.9 kg (26.2 lb)
Shipping weight	13.2 kg (29.0 lb)
Shipping box	420x420x200 mm (16.5x16.5x7.9 in)

DESIGN

Surround shape	Triple Roll
Cone shape	Exponential
Spider	Double Silicone
Pole design	T-Pole
Recommended enclosure	80.0 dm ³ (2.83 ft ³)
Recommended tuning	50 Hz

SERVICE KIT

RCK15PL1008

PARAMETERS

Fs	37 Hz
Re	5.0 Ω
Qes	0.21
Qms	6.6
Qts	0.2
Vas	154.0 dm ³ (5.4 ft ³)
Sd	855.0 cm ² (132.5 in ²)
η_0	3.6 %
Xmax	7.0 mm
Xvar	7.0 mm
Mms	121 g
Bl	26.8 Txm
Le	1.7 mH
EBP	176 Hz

1. 2 hours test made with continuous pink noise signal (6 dB crest factor) within the range Fs-10Fs. Power calculated on rated minimum impedance. Loudspeaker in free air.
2. Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
3. Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.

B&C Speakers s.p.a.

Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) - ITALY
Tel. +39 055 65721 - Fax +39 055 6572312
mail@bcspeakers.com