



15PS76

LF Drivers - 15.0 Inches

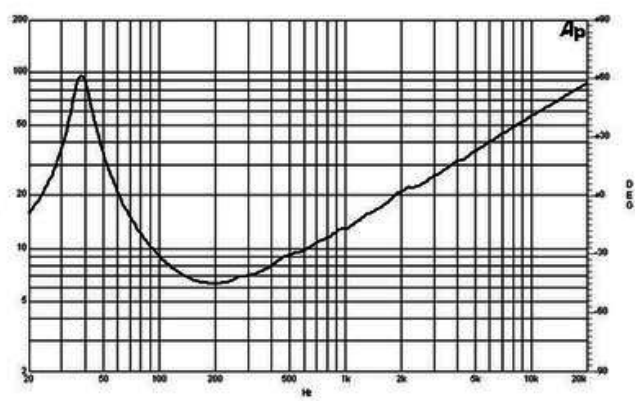

- 1100 W continuous program power capacity
- 76 mm (3 in) copper voice coil
- 40 - 2000 Hz response
- 99 dB sensitivity
- Double silicone spider with optimized compliance

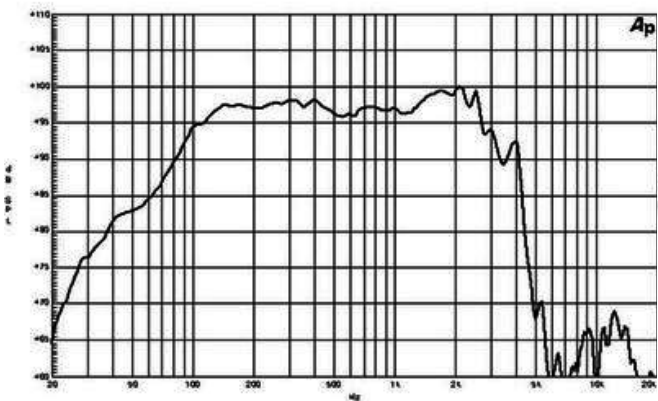

15PS76

LF Drivers- 15.0 Inches

SPECIFICATIONS

Nominal diameter	380 mm (15.0 in)
Nominal impedance	8 Ω
Minimum impedance	6.3 Ω
Nominal power handling ¹	550 W
Continuous power handling ²	1100 W
Sensitivity (1W/1m) ³	99.0 dB
Frequency range	40 - 2000 Hz
Voice coil diameter	76 mm (3.0 in)
Winding material	Copper
Former material	Glass Fibre
Winding depth	19 mm (0.75 in)
Magnetic gap depth	11 mm (0.4 in)
Flux density	1.15 T

MOUNTING AND SHIPPING INFO

Overall diameter	393 mm (15.5 in)
Bolt circle diameter	374 mm (14.7 in)
Baffle cutout diameter	354.0 mm (13.9 in)
Depth	171 mm (6.7 in)
Flange and gasket thickness	16 mm (0.62 in)
Air volume occupied by driver	0.0 dm ³ (0.0 ft ³)
Net weight	8.7 kg (19.1 lb)
Shipping weight	10.1 kg (22.2 lb)
Shipping box	420x420x200 mm (16.5x16.5x7.9 in)

DESIGN

Surround shape	Triple Roll
Cone shape	Exponential
Magnet material	Ferrite
Spider	Double Silicone
Pole design	T-Pole
Recommended enclosure	110.0 dm ³ (3.88 ft ³)
Recommended tuning	45 Hz

SERVICE KIT

RCK15PS768

PARAMETERS

F _s	38 Hz
R _e	5.0 Ω
Q _{es}	0.28
Q _{ms}	5.2
Q _{ts}	0.26
V _{as}	164.0 dm ³ (5.7 ft ³)
S _d	855.0 cm ² (132.5 in ²)
η_0	3.3 %
X _{max}	7.5 mm
X _{var}	8.5 mm
M _{ms}	106 g
Bl	22.1 Txm
L _e	1.3 mH
EBP	135 Hz

1. 2 hours test made with continuous pink noise signal (6 dB crest factor) within the range F_s-10F_s. Power calculated on rated minimum impedance. Loudspeaker in free air.
2. Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
3. Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.

B&C Speakers s.p.a.

Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) - ITALY
Tel. +39 055 65721 - Fax +39 055 6572312
mail@bcspeakers.com