



# 15TBX100

LF Drivers - 15.0 Inches

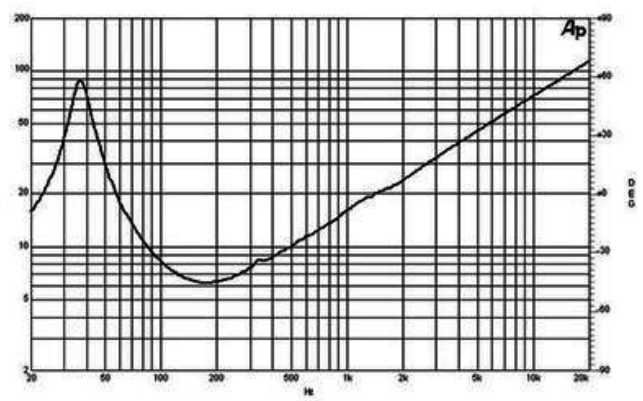

- 2000 W continuous program power capacity
- 100 mm (4 in) copper voice coil
- 35 - 1500 Hz response
- 96 dB sensitivity
- Aluminium demodulating ring allows a very low distortion figure
- Double silicone spider with optimized compliance
- Ventilated voice coil gap for reduced power compression

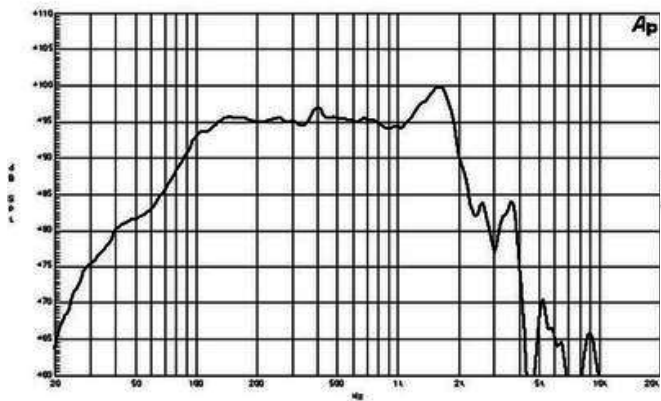

# 15TBX100

LF Drivers- 15.0 Inches

## SPECIFICATIONS

Nominal diameter	380 mm (15.0 in)
Nominal impedance	8 $\Omega$
Minimum impedance	6.2 $\Omega$
Nominal power handling <sup>1</sup>	1000 W
Continuous power handling <sup>2</sup>	2000 W
Sensitivity (1W1m) <sup>3</sup>	96.0 dB
Frequency range	35 - 1500 Hz
Voice coil diameter	100 mm (4.0 in)
Winding material	Copper
Former material	Glass Fibre
Winding depth	25 mm (1.0 in)
Magnetic gap depth	12 mm (0.5 in)
Flux density	1.1 T

## MOUNTING AND SHIPPING INFO

Overall diameter	393 mm (15.5 in)
Bolt circle diameter	374 mm (14.7 in)
Baffle cutout diameter	354.0 mm (13.9 in)
Depth	181 mm (7.1 in)
Flange and gasket thickness	16 mm (0.62 in)
Air volume occupied by driver	5.4 dm <sup>3</sup> (0.19 ft <sup>3</sup> )
Net weight	12.3 kg (27.1 lb)
Shipping weight	13.9 kg (30.6 lb)
Shipping box	420x420x200 mm (16.5x16.5x7.9 in)

## DESIGN

Surround shape	Triple Roll
Cone shape	Radial
Magnet material	Ferrite
Spider	Double Silicone
Pole design	T-Pole
Woofers cone treatment	TWP Waterproof Both Sides
Recommended enclosure	114.0 dm <sup>3</sup> (4.03 ft <sup>3</sup> )
Recommended tuning	35 Hz

## SERVICE KIT

RCK15TBX1008

## PARAMETERS

Fs	35 Hz
Re	5.1 $\Omega$
Qes	0.3
Qms	5.2
Qts	0.28
Vas	113.0 dm <sup>3</sup> (3.8 ft <sup>3</sup> )
Sd	855.0 cm <sup>2</sup> (132.5 in <sup>2</sup> )
$\eta_0$	1.95 %
Xmax	9.0 mm
Xvar	11.0 mm
Mms	163 g
Bl	25.5 Txm
Le	1.6 mH
EBP	116 Hz

1. 2 hours test made with continuous pink noise signal (6 dB crest factor) within the range Fs-10Fs. Power calculated on rated minimum impedance. Loudspeaker in free air.
2. Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
3. Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.

B&C Speakers s.p.a.

Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) - ITALY  
Tel. +39 055 65721 - Fax +39 055 6572312  
mail@bcspeakers.com