



8NDL51

LF Drivers - 8.0 Inches

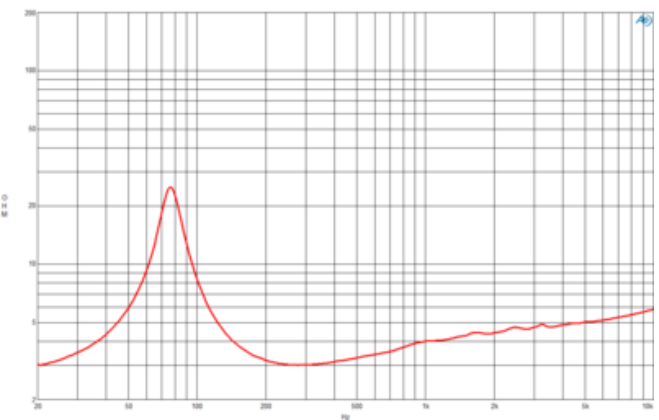

- 50 mm (2 in) copper voice coil
- 70 - 3000 Hz response
- 94 dB sensitivity
- Neodymium magnet allows a very light yet powerful motor assembly
- Shorting copper cap for extended HF response
- 400 W continuous program power capacity
- Ventilated voice coil gap for reduced power compression

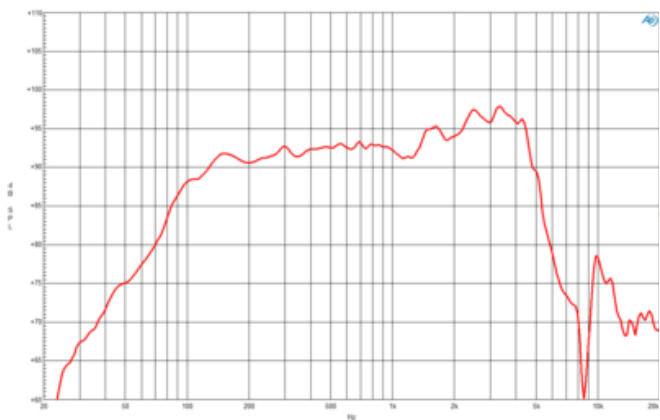

8NDL51

LF Drivers- 8.0 Inches

SPECIFICATIONS

Nominal diameter	200 mm (8.0 in)
Nominal impedance	4 Ω
Minimum impedance	3.0 Ω
Nominal power handling ¹	200 W
Continuous power handling ²	400 W
Sensitivity (1W/1m) ³	94.0 dB
Frequency range	70 - 3000 Hz
Voice coil diameter	51 mm (2.0 in)
Winding material	Copper
Former material	Glass Fibre
Winding depth	16 mm (0.63 in)
Magnetic gap depth	8 mm (0.31 in)
Flux density	1.05 T

MOUNTING AND SHIPPING INFO

Overall diameter	225 mm (8.8 in)
Bolt circle diameter	210 mm (8.3 in)
Baffle cutout diameter	187.0 mm (7.4 in)
Depth	90 mm (3.5 in)
Flange and gasket thickness	11 mm (0.4 in)
Air volume occupied by driver	1.1 dm ³ (0.04 ft ³)
Net weight	1.8 kg (4.0 lb)
Shipping units	1
Shipping weight	2.2 kg (4.8 lb)
Shipping box	300x160x180 mm (11.8x6.3x7.1 in)

DESIGN

Surround shape	Double Roll
Cone shape	Exponential
Magnet material	Neodymium Inside Slug
Spider	Single
Pole design	Straight Pole
Woofers cone treatment	TWP Waterproof Both Sides
Recommended enclosure	14.0 dm ³ (0.49 ft ³)
Recommended tuning	65 Hz

SERVICE KIT

RCK008NDL514

PARAMETERS

Fs	75 Hz
Re	2.6 Ω
Qes	0.64
Qms	5.22
Qts	0.57
Vas	10.1 dm ³ (0.36 ft ³)
Sd	220.0 cm ² (34.1 in ²)
η_0	0.73 %
Xmax	7.0 mm
Xvar	7.0 mm
Mms	27 g
Bl	7.3 Txm
Le	0.15 mH
EBP	117 Hz

1. 2 hours test made with continuous pink noise signal (6 dB crest factor) within the range Fs-10Fs. Power calculated on rated minimum impedance. Loudspeaker in free air.
2. Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
3. Applied RMS Voltage is set to 2V for 4 ohm Nominal Impedance

B&C Speakers s.p.a.

Via Poggioromo, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) - ITALY
Tel. +39 055 65721 - Fax +39 055 6572312
mail@bcspeakers.com