



# DE750TN

---



HF Drivers - 2.0 Inches



- 220 W continuous program power capacity
- 2" horn throat diameter
- 75 mm (3 in) aluminium voice coil
- Titanium diaphragm
- 500 - 18000 Hz response
- 107.5 dB sensitivity
- Shorting copper cap for extended HF response

# DE750TN

HF Drivers- 2.0 Inches

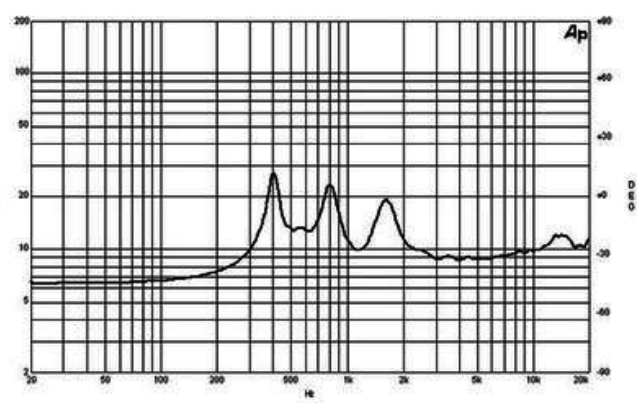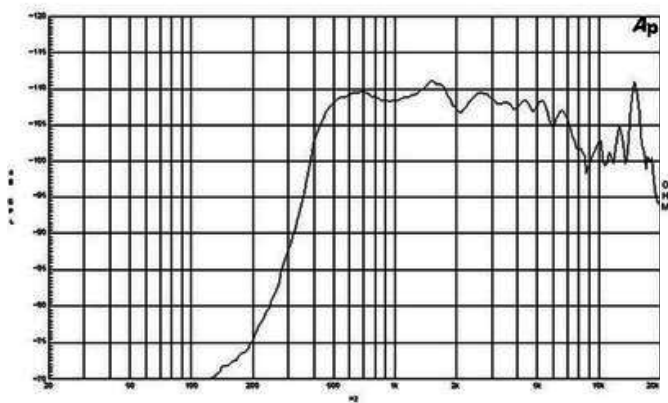

## SPECIFICATIONS

Throat diameter	50 mm (2.0 in)
Nominal impedance	8 $\Omega$
Minimum impedance	7.8 $\Omega$
Nominal power handling 1	110 W
Continuous power handling 2	220 W
Sensitivity (1W/1m) 3	107.5 dB
Frequency range	1 - 18 kHz
Recommended crossover 4	0.8 kHz
Voice coil diameter	75 mm (3.0 in)
Winding material	Aluminium
Inductance	0.14 mH
Diaphragm material	Titanium
Flux density	1.9 T
Magnet material	Ferrite

2 hour test made with continuous pink noise signal (6 dB crest factor) within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.

Power on Continuous Program is defined as 3 dB greater than the Nominal rating.

Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.

12 dB/oct. or higher slope high-pass filter.

## MOUNTING\_AND\_SHIPPING\_INFO

Four M6 holes 90° on 102 mm (4 in) diameter	
Overall diameter	180 mm (7.1 in)
Depth	87 mm (3.4 in)
Net weight	6.3 kg (13.9 lb)
Shipping units	1
Shipping weight	6.5 kg (14.3 lb)
Shipping box 190x190x120 mm (7.5x7.5x4.7 in)	

## REPLACEMENT\_\_DIAPHRAGM

MMD3ATN8

B&C Speakers s.p.a.

Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) - ITALY  
Tel. +39 055 65721 - Fax +39 055 6572312  
mail@bcspeakers.com

