PRODUCT INTRODUCTION

DIGITAL CONFERENCE SYSTEM PRODUCTS

M4103E3 | Interpretation unit



Earphone port



320×64LCD



FLOOR/RELAY



OUTPUT A,B



Product Function


CR-M4103 interpretation unit, with a concise and direct-viewing appearance, 12 channel simultaneous interpretations, direct and indirect interpretation. Adopt CREATOR-created unique audio high-frequency update and compensation technology, clear sound compensation, the space effects, genuine audio correction.

Product features

- To adopt circumaural earphone to monitor and speaker.
- Connect with 36 translation unit and 12 simultaneous interpretations including the floor one.
- Direct and indirect translation.
- The translate machines can constitute the double translator system, and interlock in the same channel.
- Divert quickly between FLOOR and RELAY.
- Time automatically when speech.
- Press CALL for help
- 3.5mm jack connects to headset.
- Power supplied by controller.

PARAMETER

Power supply	DC24V supplied by the control controller	Intercommunication	DIN 8-PIN
Power consumption	4W	Earphone output	9dBu，8-32Ω，3.5mm
Loudspeaker power	2W	Soniferous types	Cordiform capacitor
Crosstalk attenuation	>80dB	Distortion	<0.1%
SNR	>50dB	Sensitivity	-22dBv/Pa
Frequency response	60-16KHz	Color	Grey
Size	290L×130W×100H(mm)		

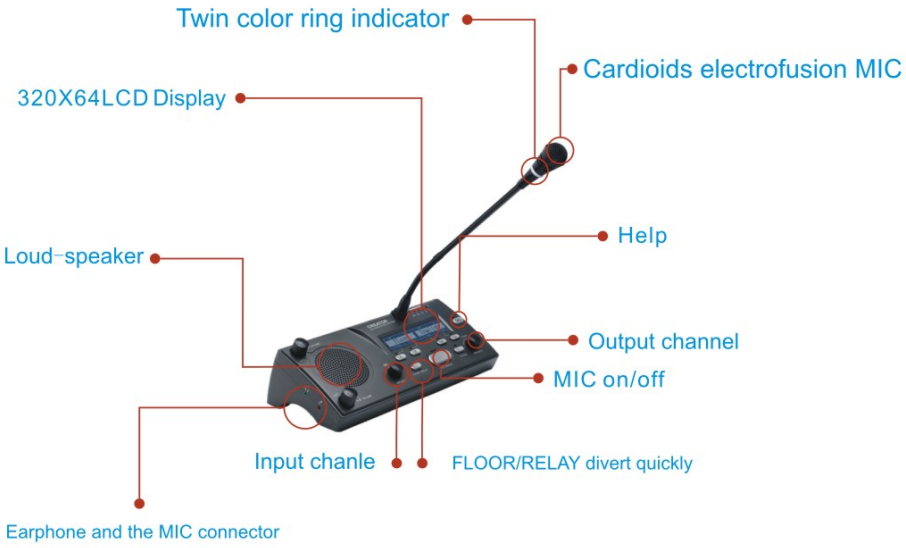

Remarks: M4101E3-8/12 shoud be connected in daisy-chain

Diagram

