CR-M4104A1 Discussiony delegate unit



CR-M4104A2
Delegate unit with voting, election



Product Function

CR-M4104A1 is a Discussion delegate unit, CR-M4104A2 is a delegate unit with voting, election function. They are both folded design. Use hifi louder speaker make the voice more harmonious. Loudspeaker will automatically mute to avoid howling. Professional DSP chips and timbre improved circuits, which compensates gain in the intermediate frequency voice and unscramble the voice of speakers well.

Product features

- Elegant folded panel design.
- Hifi louder speaker make the voice more harmonious.
- Heart-shaped capacitive microphone with twin color ring indicator.
- Earphone connector, adjust volume easily.
- The power of delegate unit and chairman unit are supplied by the central control unit.
- With 24V safety current.
- Communicating in the hand-in-hand daisy-chain, it is easy to install and maintain.

PARAMETER

Power supply	DC24V supplied by the control controller	Intercommunication	DIN 8-PIN
Power consumption	3W	Earphone output	9dBu，8-32Ω，3.5mm
Loudspeaker power	2W	Soniferous types	Cordiform capacitor
Directional pattern	Cardioids	Crosstalk attenuation	>80dB
SNR	>80dB	Distortion	<0.1%
Frequency response	60-16KHz	Sensitivity	-22dBv/Pa
Size	218L×138W×56H(mm)	Color	Black

PRODUCT INTRODUCTION

DIGITAL CONFERENCE SYSTEM PRODUCTS

M4102/04A | Chairman unit/delegate unit with folded cover




Chairman unit



Delegate unit



Chairman unit

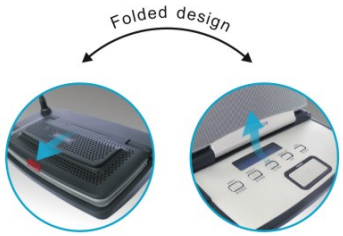



Product Function

CR-M4102A2 is a folded design chairman unit, can achieve voting, election. Use hifi louder speaker make the voice more harmonious. Loudspeaker will automatically mute to avoid howling.

Product features

- Elegant folded panel design.
- Hifi louder speaker make the voice more harmonious.
- With the voting and election function .
- Heart-shaped capacitive microphone with twin color ring indicator.
- Earphone connector, adjust volume easily.
- Chairman has the power to start and stop voting, pause and cancel speaking.
- Chairman has no limite of the number of speakers.
- Chairman unit has the priority to cantrol the whole meeting.
- Chairman unit has no limite in installin,it can be in series installed in any place.
- The power of delegate unit and chairman unit are supplied by the central control unit.
- With 24V safety current.
- The built-in loudspeaker will automatically mute to avoid howling. when the microphone turns on.
- Communicating in the hand-in-hand daisy-chain, it is easy to install and maintain.




PARAMETER

Power supply	DC24V supplied by the control controller	Intercommunication	DIN 8-PIN
Power consumption	3W	Earphone output	9dBu，8-32Ω，3.5mm
Loudspeaker power	2W	Soniferous types	Cordiform capacitor
Directional pattern	Cardioids	Crosstalk attenuation	>80dB
SNR	>80dB	Distortion	<0.1%
Frequency response	60-16KHz	Sensitivity	-22dBv/Pa
Size	247L×155W×60H(mm)	Color	Black


Twin color ring indicator
Heart-shaped capacitive MIC
Flat louder speaker
(supply harmonious , intermediate frequency tone, especial of human voice transfer.)
LED display
(display the voting result and the conference situation)
One Button with multifunctions
(Chairman unit has both the "Priority"& "Speaking" function on one button, press the button for 3 minutes can achieve "Priority" function)
Earphone jack
Multifunctional button
(5 multifunctional buttons can support the voting)

Diagram

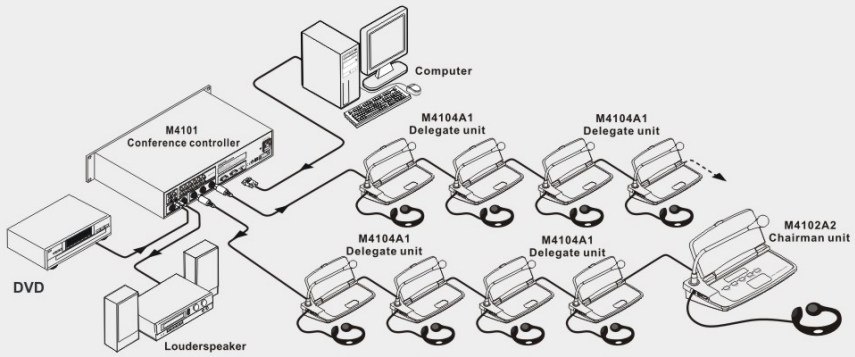
Computer
M4101
Conference controller
M4104A1
Delegate unit
M4104A1
Delegate unit
M4102A2
Chairman unit
M4104A1
Delegate unit
M4104A1
Delegate unit
DVD
Louderspeaker