

THEATRICAL LIGHTING

ACENTO ELLIPSOIDAL 15-30°

Model 50-16 575/600/800 Watts



DICHOIC REFLECTOR

Dichroic coated glass reflector, provides bright light output and cool beam



IRIS DIAPHRAGM Model 40-90

Use a new iris diaphragm of 24 leaves for improving the quality of the light beam.




LENSES

Crown glass lenses with anti-reflective coating.

Efficient, Compact and Lightweight Zoom Ellipsoidal spotlight. Built in extruded aluminium and die-cast parts. Use the new optical technology, for producing more light output and using less electricity than conventional 1000 watts ellipsoidals. Designed for using the new generation of lamps 575W, 600W and 800W with dichroic coated glass reflector. Variable spread of 15° to 30° beam angles.

PHOTOMETRIC DATA

With lamp GLC 575w 120v

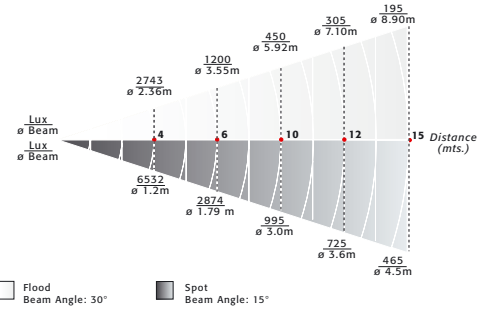

LAMPS

ANSI CODE	BRAND CODE	Volts	Watts	Life Hs.
GKV	GKV PHILIPS	230V	600	400
GLC	GLC PHILIPS	115V	575	400
GLB	GLB PHILIPS	230V	600	1500
GLA	GLA PHILIPS	115V	575	1500
HX800	HX800GE	230V	800	400

- These equipments comply with all applicable European directives and safety standards



ACCESSORIES

Acento Profile



45-42




00-54



51-01

- Donut - Model 40-93
- Top Hat - Model 40-94
- Gel Extender - Model 40-82
- Pattern Holder - For "B" size, metal and glass, Model 40-91



Acento Ellipsoidal 15-30° MODEL 50-16

L	590mm. (23.24")
W	260mm. (10.24")
H	330mm. (13.00")
kg	7Kg. (15.43 Lbs.)
	650x270x270mm. (25.60"x10.63"x10.63")