FOLLOWSPOTS









ACENTO FOLLOWSPOT line discharge lamps and halogen lamps source offers excellent beam qualities at all settings. Double condenser zoom optical system gives powerful high intensity lighting. Variable spread angles from 8° to 22°. Robust mechanical construction, style, ease of opearation and maximum safety. Provided with five colour changer, iris diaphragm and mechanical dimmer.

Acento Followspots are available for discharge lamps MSD/MSR 575w, 700w and 1200w, as well as tungsten halogen 2000w, for distrance throuw up to 40 meters.


- Profiles double condenser lenses and glass reflectors.
- For theatres, concert halls, touring, TV studios, other stages.
- High performance Zoom optics.
- Fast focusing system.
- Five colour changer.
- Iris diaphragm.
- Mechanical dimmer.
- Rotatable shutter gate with four shutters.
- Double microwitch interlock for safe lamp replacement.
- Easy access for lens cleaning.
- These equipments comply with all applicable European directives and carry a CE mark.

ACENTO FOLLOWSPOT 1200w/700w MSD/MSR


Model 50-36 (700w)/ Model 50-37 (1200w)



- Double condenser lenses
- Glass reflector
- Throw 10-40mts
- Beam angle 8° - 22°



ACENTO FOLLOWSPOT 700W or 1200w MSD/ MSR - Model 50-36 & 50-37	
L	895mm. (35.24")
W	320mm. (12.60")
H	380mm. (14.96")
kg.	18.5Kg. (40.77 Lbs.)
	400x400x1000mm. (15.75"x15.75"x39.37")



BALLAST 700W or 1200 MSD/MSR Model 50-36 & 50-37	
L	400mm. (15.75")
W	270mm. (10.63")
H	270mm. (10.63")
kg.	12.3Kg. (27.11 Lbs.)
	500x350x350mm. (19.70"x13.78"x13.78")

LAMPS

PHILIPS CODE	OSRAM CODE	W	Hs Life	BASE
MSR	HSR	1200	1000	G22
MSD		1200	3000	G22
MSR	HSR	700	1000	G22
MSD		700	3000	G22

SUPPLIED WITH:

- Ballast
- 5-colour Colour changer
- Iris
- Mechanical Dimmer
- Color frame
- Spigot 28m
- G22 lampholder
- 2.0m power supply cable


- These equipments comply with all applicable European directives and safety standards

AR 1542

ACCESSORIES
Acento Followspot



PHOTOMETRIC DATA
ACENTO FOLLOWSPOT 1200w

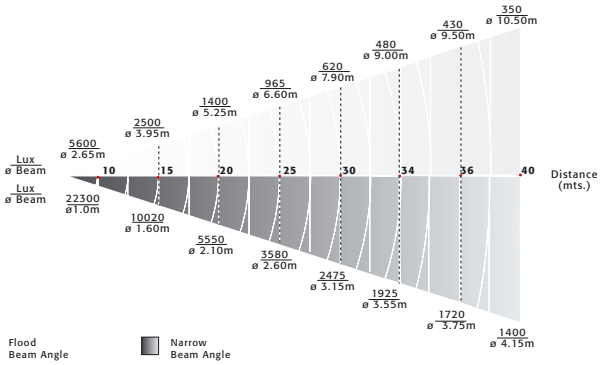

PHOTOMETRIC DATA
ACENTO FOLLOWSPOT 700w

