FOLLOWSPOTS









ACENTO FOLLOWSPOT line discharge lamps and halogen lamps source offers excellent beam qualities at all settings. Double condenser zoom optical system gives powerful high intensity lighting. Variable spread angles from 8° to 22°. Robust mechanical construction, style, ease of opearation and maximum safety. Provided with five colour changer, iris diaphragm and mechanical dimmer.

Acento Followspots are available for discharge lamps MSD/MSR 575w, 700w and 1200w, as well as tungsten halogen 2000w, for distrance throuw up to 40 meters.

- Profiles double condenser lenses and glass reflectors.
- For theatres, concert halls, touring, TV studios, other stages.
- High performance Zoom optics.
- Fast focusing system.
- Five colour changer.
- Iris diaphragm.
- Mechanical dimmer.
- Rotatable shutter gate with four shutters.
- Double microwitch interlock for safe lamp replacement.
- Easy access for lens cleaning.
- These equipments comply with all applicable European directives and carry a CE mark.


ACENTO FOLLOWSPOT 2000W HALOGEN

Model 50-38






- Double condenser lenses
- Glass reflector
- Throw 10-30mts
- Beam angle 8° - 22°



ACENTO FOLLOWSPOT 2000W HALOGEM - Model 50-38	
L	970mm. (38.19")
W	320mm. (12.50")
H	490mm. (19.29")
kg	15.30Kg. (33.72 Lbs.)
	400x400x1000mm (15.75"x15.75"x39.37")

PHOTOMETRIC DATA

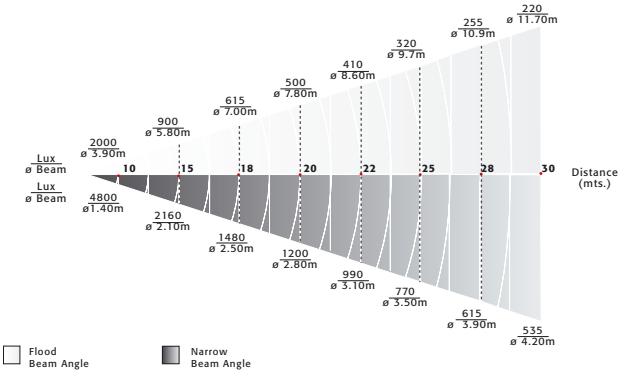

SUPPLIED WITH:

- Ballast
- 5-colour Colour changer
- Iris
- Mechanical Dimmer
- Color frame
- Spigot 28m.
- Gy16 lampholder
- 2.0m power supply cable

ACCESSORIES

Acento Followspot


Stand


Spigot


Diaphragm

LAMPS

LIFE CODE	ANSI CODE	W	V	BASE
CP/72/CP43	FTM	2000	230	GY16
CP/79	GE 90360	2000	120	GY16

- These equipments comply with all applicable European directives and safety standards

AR 1542