NEUTRIK



NA1394-6-W

Firewire 6 with IEEE 1394 6 pole receptacles on both ends, Nickel D-housing

Due to the rising digitisation the interface problems between audio/video networks, IT equipment (e.g. Mac) and mLAN connections increase.
Neutrik's Firewire feedthrough type 1394a, mounted in the standardized D-shape housing, solves this problem.

Features & Benefits

- Ideal for audio networking and integration of digital equipment into audio systems
- Universally accepted standard D-shape housing
- Firewire feedthrough with 6 pole IEEE 1394 receptacle at both ends
- Removable screen to chassis grounding:

NEUTRIK


Technical Information


Product	
Title	NA1394-6-W
Connection Type	Firewire
Gender	female

Mechanical	
Wiresize	
Mounting direction	Front mounting
Chassis shape	D


Material	
Contact plating	Au
Contacts	Brass (CuZn39Pb3)
Insert	PBTP 15 % GR
Shell	Zinc diecast (ZnAl4Cu1)
Shell plating	Nickel


Environmental	
Flammability	UL 94 V-0
Standard compliance	IEEE 1394
Temperature range	-25 °C to +85 °C

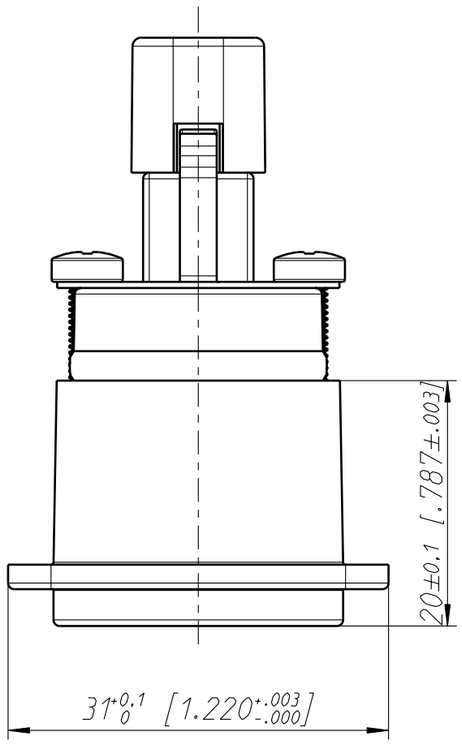


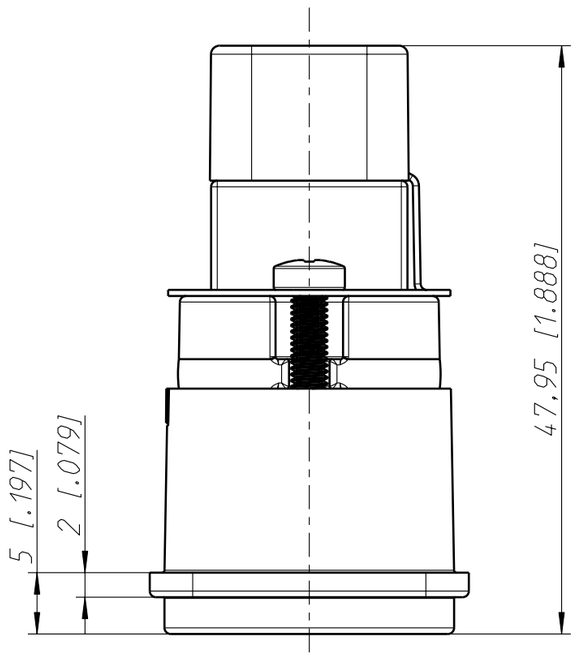

Frontplattenausschnitt (Rückseite)
Panel cut out (rear side)

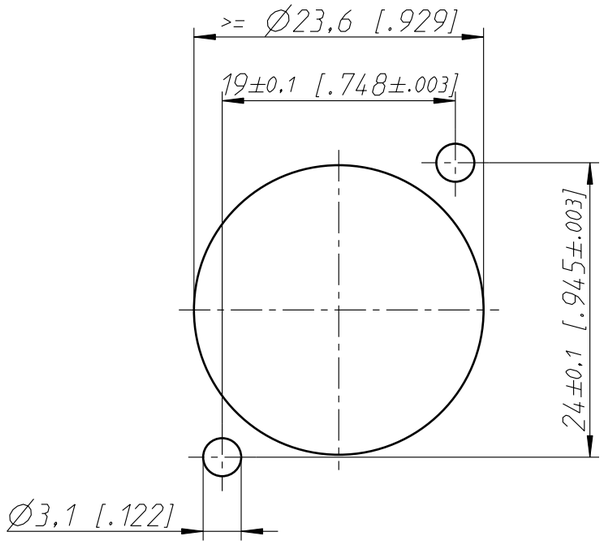

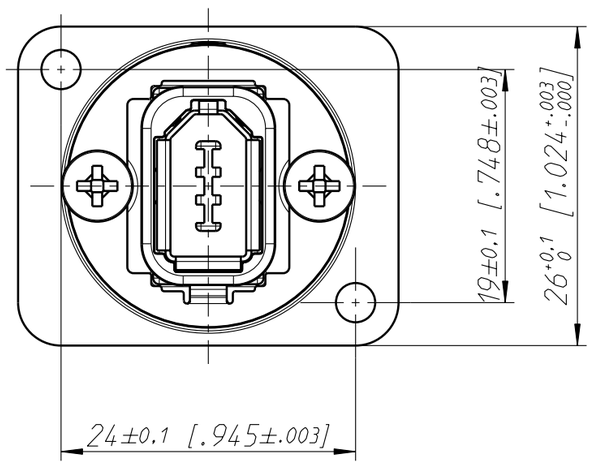

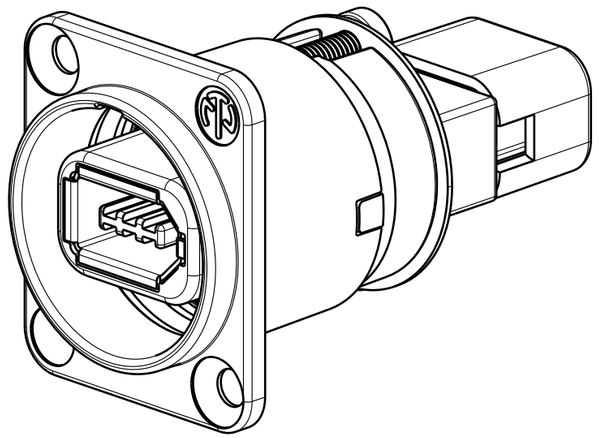

Allgemeintoleranzen ISO 2768-m	Werkstoff	Massstab:		Datum	Name
			Gezeichnet	05.05.09	Mijatovic
Zeichnung urheberrechtlich geschuetzt (DIN 34) (C)	- -	2:1 (A3)	Freigegeben		
			Geaendert	21.09.10	jutz b
Benennung NA1394-6-W NA1394-6-W			Aend.-Nr. -		Aend.-Index A
			Ersatz fuer:		Blatt 1 von 1 Bl.
NEUTRIK AG FL-9494 SCHAAN			Zeichn. Nr. ST-NA1394-6-W		