Pioneer

DJ 耳机

产品型号：HDJ-500-K 黑色
HDJ-500-R 红色

请通读使用说明书，以便您了解如何充分发挥其性能。通读完毕之后，请妥善保存，以备日后参考。

⚠ 警告

- 将耳机音量调节至适当水平。声音过高将会损伤您的听力。
- 为了交通安全，骑自行车、摩托车或驾驶汽车时切勿使用耳机。过度增加音量将会非常危险，因为您将无法听到外界的声音。请对您周围的交通状态时刻保持小心。

⚠ 小心

- 切勿试图查看耳机内部或改造本耳机。如果客户对本耳机进行了改造，则先锋将无法保证其性能。


使用注意事项

- 避免严重冲击，例如摔落、击打或其它类型的任何撞击。
- 当耳机变脏时，用干的软布擦拭。小心切勿把污垢吹到扬声器装置内部。
- 如果插头变脏，音质将会下降或者甚至不发声。经常用干的软布擦拭插头，使其保持清洁。
- 在长时间使用或存放后，耳垫可能会损坏。


连接/断开耳机线

连接耳机线：

① 对齐耳机主机上的“▼”和耳机线插头的“▲”标记，然后插紧。

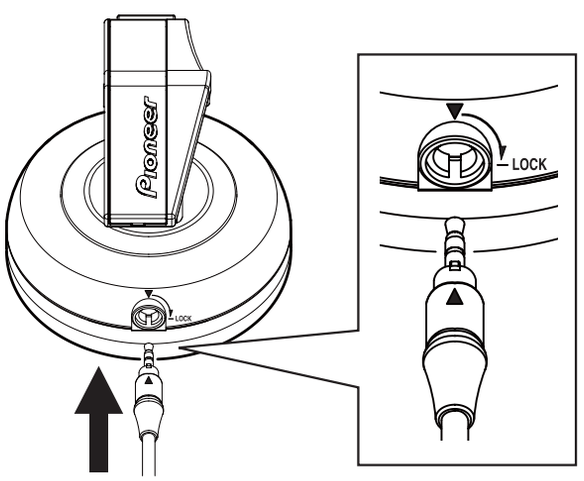

② 向右旋转耳机线插头90°锁定插头，使耳机上的“-LOCK”标记与插头上的“▲”对齐。

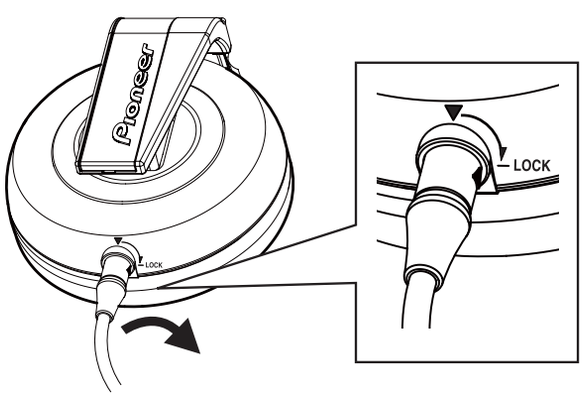


断开耳机线

- 向左旋转耳机线插头90°，使耳机上的“▼”标记与耳机线插头上的“▲”对齐，然后拔出插头。

右声道旋转功能

这些耳机设计允许旋转右声道耳罩，适合单耳监听。
除了默认的中心位置，右声道耳罩可根据需要前后旋转60°，用于单耳监听。

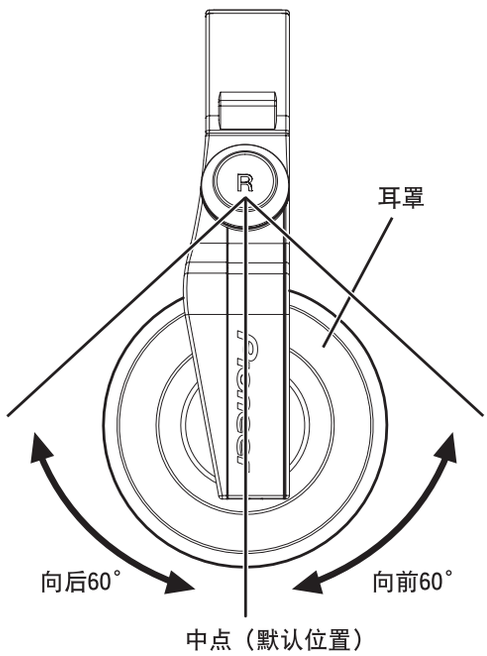

规格

类型	封闭式动态耳机
频率响应	5 Hz ～ 28 000 Hz
阻抗	45 Ω
灵敏度	105 dB
最大输入功率	2 000 mW
驱动单元	Ø 40 mm圆顶类型
耳机线	一侧连接1.2 m盘绕类型(延长3.0 m)
插头	Ø 3.5 mm 3P微型插头(镀金、螺纹类型)
耳机质量	195 g(不含耳机线)
附件	1.0 m直线、Ø 6.3 mm 3P插头适配器(镀金、螺纹类型)

注意：
由于耳机的改进，规格和设计可能会被修改，不作另行通知。

PIONEER CORPORATION
日本先锋公司

销售商：先锋电子(中国)投资有限公司
地址：中国上海市市北工业园区江场三路126号4层

版权 © 2010 日本先锋公司。

产品产地 ： 中国制造
出版日期 ： 2010年8月10日

Pioneer

DJ HEADPHONES

HDJ-500-K / HDJ-500-R

Please read through these operating instructions so you will know how to operate your model correctly.

⚠ WARNING

- Adjust headphones sound to the proper volume. Loud sound may damage your ears.
- For traffic safety, never use the headset while riding a bicycle motor bike or while driving a car. It is dangerous to increase the sound volume too much because you cannot hear external sounds; take great care about traffic around you.

⚠ CAUTION

- Never inspect the inside OR remodel this machine. If the customer remodels this machine, PIONEER will no longer guarantee its performance.


Precautions for use

- Avoid heavy shocks like dropping, hitting or any other type of strong impact.
- When earphones are dirty, wipe with a dry, soft cloth. Take care not to blow into the speaker unit.
- Sound quality may deteriorate or sound may be interrupted if the plug is dirty. Keep the plug clean by wiping it with a dry, soft cloth occasionally.
- Ear pads may deteriorate by long use or storage.


Attaching/Detaching the cable

To attach the cable

1 Align the '▼' mark on the headphone body with the '▲' mark on the cable plug, and insert securely.

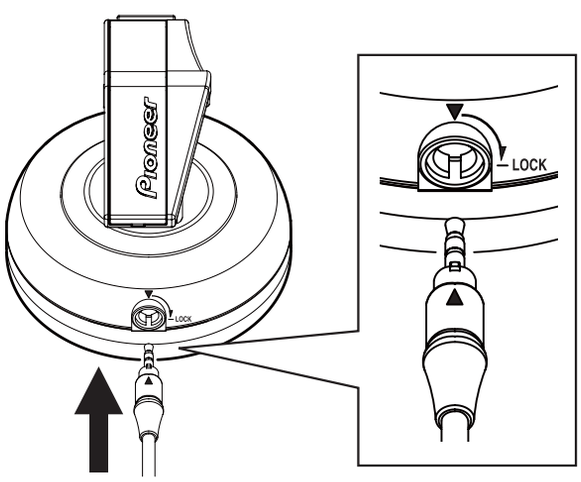

2 Lock the plug by rotating the cable plug 90° to the right, so that the '–LOCK' mark on the headphone is aligned with the '▲' mark on the plug.

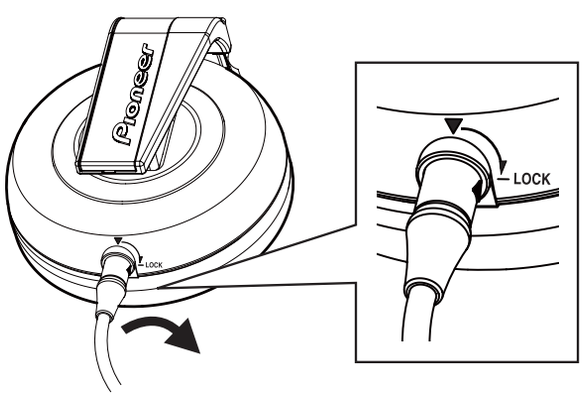


To detach the cable

- **Rotate the cable plug 90° to the left so that the '▼' mark on the headphone body is aligned with the '▲' mark on the cable plug, then pull out the plug.**

Right channel swivel function

These headphones are designed to allow the R-ch housing to swivel, thus facilitating single-ear monitoring.
In addition to the default center position, the right channel housing can be swiveled 60° to front or rear as desired for monitoring with one ear.

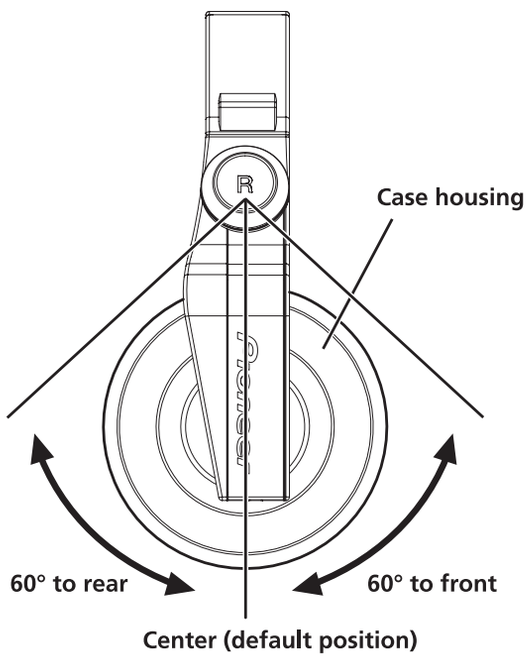

SPECIFICATIONS

Type	Fully enclosed dynamic headphones
Frequency response	5 Hz to 28 000 Hz
Impedance	45 Ω
Sensitivity	105 dB
Maximum power input	2 000 mW
Driver units	Ø 40 mm dome type
Cord	1.2 m long one-side connection coiled type (extended length 3 m)
Plug	Ø 3.5 mm 3P mini-plug (gold plated, threaded type)
Weight	195 g (without cord)
Accessories	1.0 m straight cable, Ø 6.3 mm 3P plug adaptor (gold plated, threaded type)

NOTE:
Specifications and design are subject to possible modifications without notice due to improvements.

<WRB1156-A/FJK>