
OPERA 2500 MK2 (PF 1183)



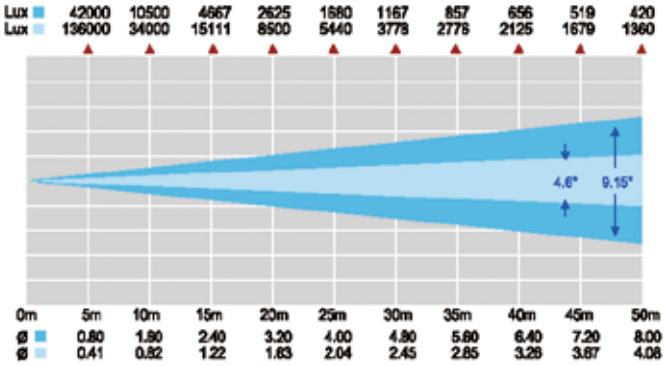

Descriptions

OPERA MMD MK2 should be fixed on an appropriate stand which will remain stable on an incline of up to 15°using the bracket. Using all aluminium chassis, the HMI 2500W/SE(OSRAM) or MSR 2500W/HR(PHILIPS) lamp provides many benefits for a host of different lighting applications. it is equipped with an electronic ballast controllable via standard DMX 512, it is possible to dim the variable from 0% to 100%, beam angle from 5° to 9°, and also very suitable for discotheque application, during live shows, concert ... etc.

Opera 2500 MK2

POWER SUPPLY:	230V 50Hz (240V and /or 60Hz to order).
POWER CONSUMPTION:	2800 VA at 230V.
LAMP:	HMI 2500W/SE (Osram). Color temperature 6000K. Socket G38. Life 500 hours (manufacturers rating). MSR 2500W/HR(Philips). Color temperature 6000k. Socket G38. Life 750 hours (manufacturers rating). Easy lamp adjustment via external screws.
ZOOM:	Beam angle variable between 5°-9°.
DIMMER,BLACK-OUT:	Variable dimmer from 0% to 100%
IRIS:	Iris included as standard. In the same position it is possible to mount the optional gobo holder which accepts standard M size gobos.
COOLING:	Forced cooling via axial and turbine fans.
HOUSING:	Extruded aluminum profile and steel plate. Metal parts have epoxy powder paint finish. Easy access to lamp and main components. Protection rating IP20.
CONTROL:	The projector may be mounted titled at +/-16° from the horizontal axis. Maximum ambient temperature 35°C.
DIMENSIONS:	1519mm L x 427mm W x 548mm H.
WEIGHT:	Projector 48.8kg Ballast 31kg

