
SPARK 575 MK2 (PF 1310)



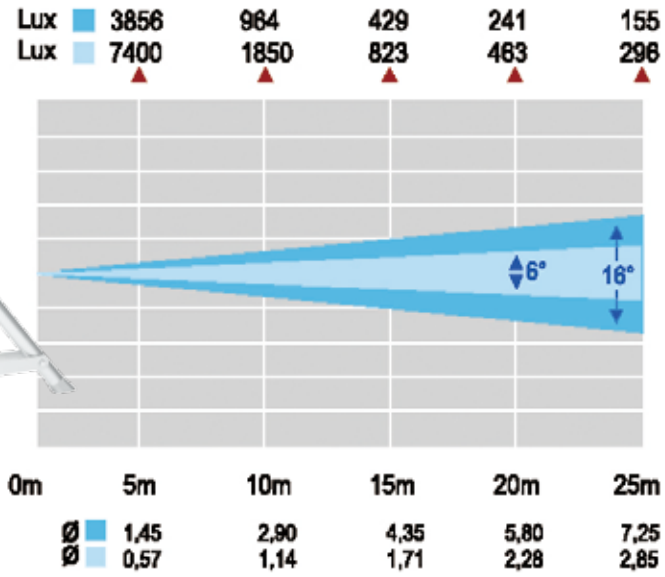

Descriptions

FAL launches its new high-end prefocus lamp series called SPARK. The SPARK 575 MK2 position itself on the top of the range and presents a superb collection of attractive and unparallel features. The new project use all aluminium chassis, a HSR 575 or MSD575(PHILIPS) fast fit lamp. Has a optional colour changer for 5 dichroic filters. The light beam can be adjusted from 10° to 20°, it may be tilted +55°/-44°from the horizontal. THE SPARK 575 MK2 boasts a full set of features to make it suitable for a wide range of entertainment applications.

SPARK 575 MK2	
POWER SUPPLY:	230V, 50Hz (60 to order).
POWER CONSUMPTION:	800VA at 230v.
LAMP:	MSR 575, MSR 575/2, HSR 575/60, HSR 575/72, HSD 575, MSD 575 discharge lamp. Colour Temperature 5600k.
ZOOM:	Socket GY 9.5, life 2000 hours (manufacturer ratings).
BLACKOUT:	Beam angle variable between 10° - 20°.
COLOURS:	Blackout shutter provided.
IRIS:	Optional colour changer for 5 dichroic filters or gel.
DIMMER:	Optional interchangeable iris.
COOLING:	Variable dimmer from 0% to 100%
HOUSING:	Forced cooling via low noise axial fan. Extruded aluminium and steel plate. Metal parts have epoxy powder paint finish. Easy access to lamp and main components. Protection:IP20.
OPERATING CONDITIONS:	Projector may be tilted +55°/-40° form the horizontal. Maximum ambient temperature 35°C.
DIMENSIONS:	1088mm L x 365mm W x 310mm H.
WEIGHT:	17.8kg.

