
DS-2CE16C2T-IR

HD720p Turbo HD Bullet Camera






Key Features

- HD720p Video Output
- HD-TVI Standard Technology
- True Day/Night
- DNR, Smart IR
- 20 m IR Distance
- IP66 Weatherproof

	DS-2CE16C2T-IR
Camera	
Image Sensor	1/3" progressive scan CMOS
Effective Pixels	1280 x 720
Minimum Illumination	0.04 lux @ (f/2.5, AGC on), 0 lux with IR
Shutter Time	1/30 sec. to 1/50,000 sec.
Lens	3.6 mm, f/2.5 (2.8 mm, 6 mm optional), angle of view: 76.88° (3.6 mm), 99.73° (2.8 mm), 50.1° (6 mm)
Lens Mount	M12
Angle Adjustment	Pan: 0–360°, tilt: 0–90°, rotation: 0–360°
Day/Night	IR cut filter
Synchronization	Internal synchronization
Video Frame Rate	30 fps
HD Video Output	1 analog HD output
S/N Ratio	More than 62 dB
General	
Working Temperature/Humidity	-40° C–60° C (-40° F–140° F) Humidity 90% or less (non-condensing)
Power Supply	12 VDC
Power Consumption	Maximum 1.5 W
Ingress Protection	IP66
IR Range	Up to 20 m IR range
Dimensions	Φ70 × 149.5 mm (Φ2.76" × 5.89")
Weight	360 g (0.79 lb.)

Dimensions

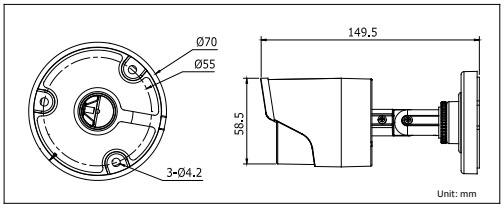

Accessories



Video Balun
DS-1H18

Available Models

DS-2CE16C2T-IR