
SB-5440RL

4X1 STEREO AUDIO SELECTOR SWITCHER W/ IR REMOTE CONTROL



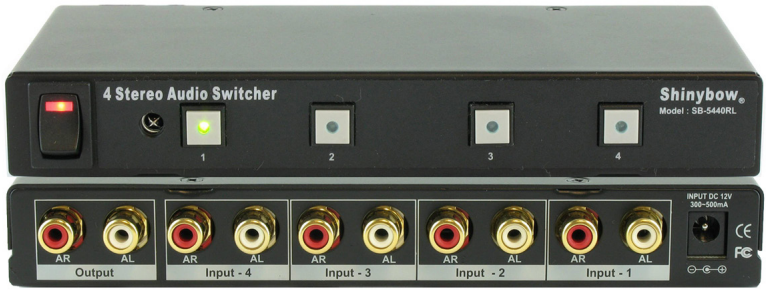

INPUTS: 4X STEREO AUDIO (RCA CONNECTORS)

OUTPUTS: 1X STEREO AUDIO (RCA CONNECTOR)

INTRODUCTION

SB-5440RL is a (4) inputs to (1) output Stereo Audio(AR/AL) router switcher. This is Audio switcher product is one of the most innovative Stereo Audio (AR/AL)routing switcher product. Supports (4) individual inputs with (1) individual output and wall mount type. Any inputs on switcher may be routed to any 1 output. It completely eliminates the need to constantly move around cable of Audio input and output. This switcher is suit for sources from full HD LCD HDTV Television or HD Plasma display monitor applications to speakers. Control is provided via front select push buttons with LED readout and IR remote controller.


FEATURES

- (4) Inputs To (1) Output Stereo Audio Router Switcher
- Support switch signal Stereo Audio via 8x RCA Connectors
- Audio Bandwidth : 60MHz (-3dB)
- Infrared : IR remote control via frequency (38Khz)
- Suitable switch Audio for Video player device and HDTV, LCD TV, Plasma TV, HD Monitor displays
- Controls by front panel push buttons with LED readout and IR remote controller
- Supports Lower power consumption full load under 180mA
- Power supply offer a universal type 100~240VAC switch

SPECIFICATIONS

- Type of switcher : (4) inputs to (1) output Audio Routing Switcher
- Type of Signals : Stereo Audio via 8x RCA Female Connectors
- Video Bandwidth : 60MHz, (-3 dB)
- All Hostile Crosstalk : -56dB@5MHz, -45dB@50MHz
- Scan Rates Accepted : 50Hz or 60Hz
- IR Infrared Frequency : 38 KHz
- Controls : Direct selection via front panel pushbuttons with LED readout or IR Remote Controller
- Safety Approvals : CE, FCC, VCCI , REACH, Erp, WEEE
- Dimensions (LxWxH) : 6.90 x 3.12 x 1 in (176x80x25 mm)
- Net Weight (Unit Only) : About (with metal case) 0.5kg/1.1 lb
- Power Voltage Input : DC 12V @ 0.66A

EXAMPLE

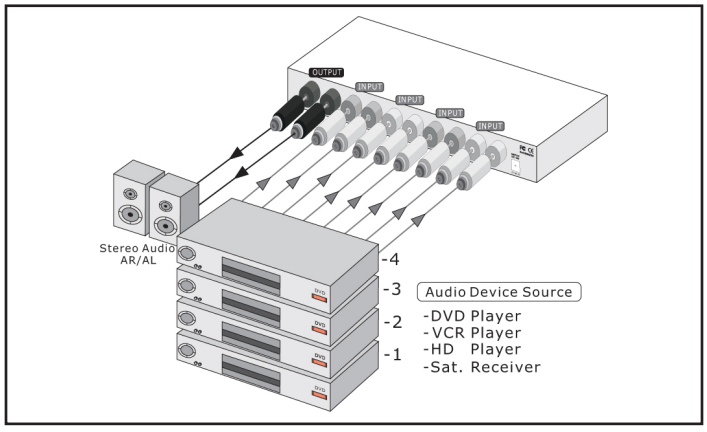

4X1 STEREO AUDIO ROUTER SWITCHER