SB-5601

2x1 HDMI SWITCHER

HDMI SWITCHER

Inputs : 2x HDMI with HDCP
Outputs : 1x HDMI with HDCP



INTRODUCTION


The SB-5601 is a competitive, high performance switcher designed for HDMI signal support Digital Video TMDS format and Digital Audio via HDMI connector.

Providing 2 inputs and 1 output, the switcher support data rates up to 2.25 Gbps. Also Control any inputs to output via press the selection buttons on front panel.

This product is certified, and with fully HDMI and HDCP compliant.

The product approved the CE , FCC compliant. Support High resolution1080p quality HDMI sources to HDMI display, monitor or projector.

SB-5601 HDMI SWITCHER 2x1

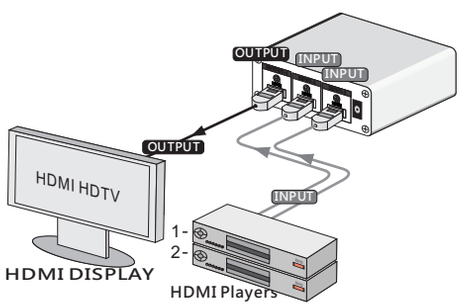

2x1 HDMI ROUTING SWITCHER

FEATURES

1. Support 2:1 HDMI Switcher
2. Input : 2x HDMI (with HDCP) via 2x HDMI connectors
   Output : 1x HDMI (with HDCP) via 1x HDMI connector
3. Support HDMI Max Data Rate – 2.25Gbps
4. HDTV Compatible and HDCP compliant
5. Control by press buttons on the real panel
6. Power Input : DC 12V, AC100V~240V Universal switch adaptor

SPECIFICATIONS

1. Type of Switcher:	2x1 HDMI Switcher
2. Type of Signal:	TMDS Digital Video PCM Digital Audio
3. Compliant with HDMI standard:	HDMI and HDCP
4. HDTV Support:	1080p HDMI formats and UXGA 1600x1200
5. Data Rates:	250Mbps to 2.25 Gbps
6. Pixel clocks:	25MHz ~ 225 MHz
7. HDMI Cable Distance:	15 meters at 2.25Gbps
8. Controls:	select buttons on the front panel
9. Safety Approvals:	CE, FCC, VCCI, REACH, Erp, WEEE
10. Dimensions:	4.45" x2.84" x1.15"(112.9mm x72mm x29.1mm)
11. Shipping Weight:	0.2 kgs / 0.44 lb
12. Power Supply:	DC 12V /0.42A Max
	Use Universal Switch Type 50/60Hz, 100~240VAC

SHINYBOW™ © 2014 Copyrighted All Rights Reserved.