

SHINYBOW™
9FL, NO.63, JU GUANG RD., CHUNG HO DIST., NEW TAIPEI CITY (235) TAIWAN
TEL: (+886) 2 2228-8208 FAX:(+886)2 2228-8200


SB-5800
32x32 Modular Matrix Switch

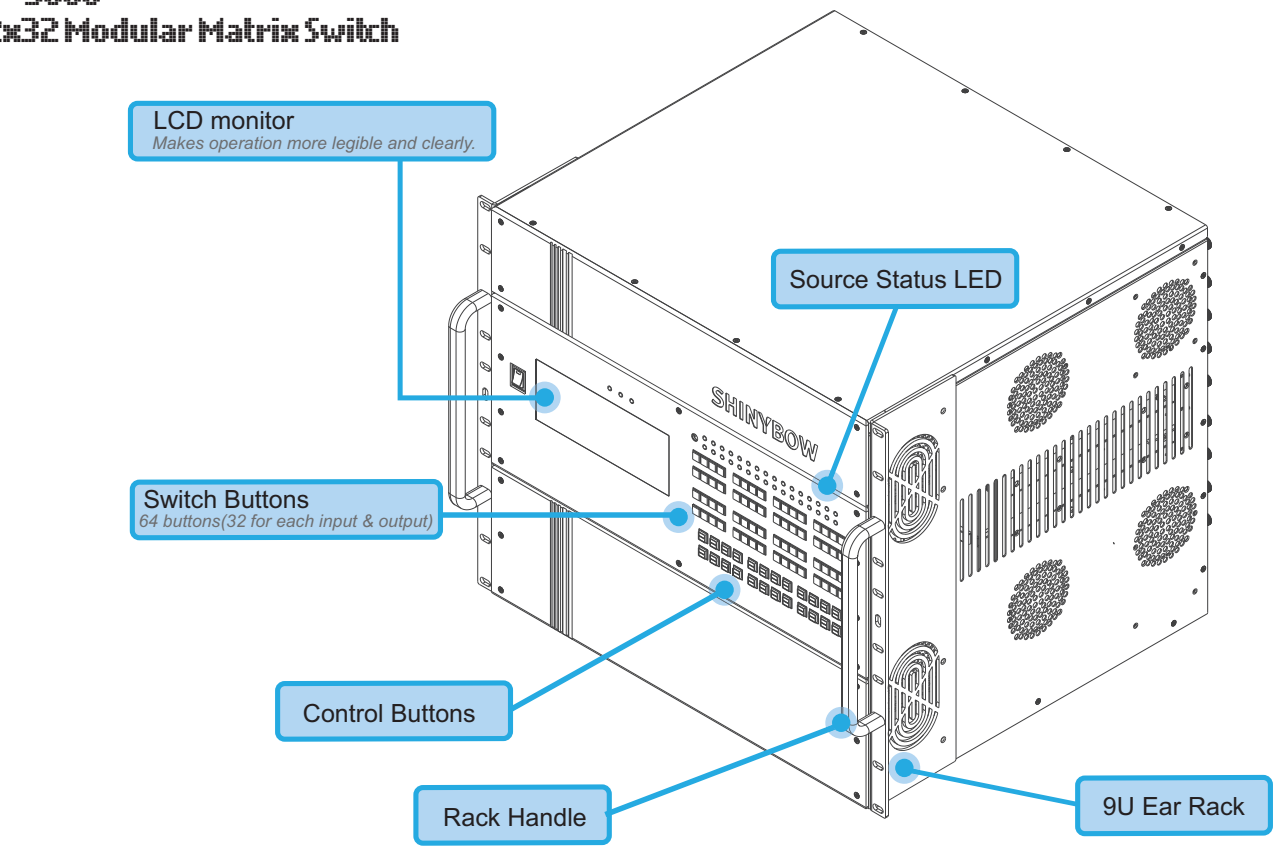

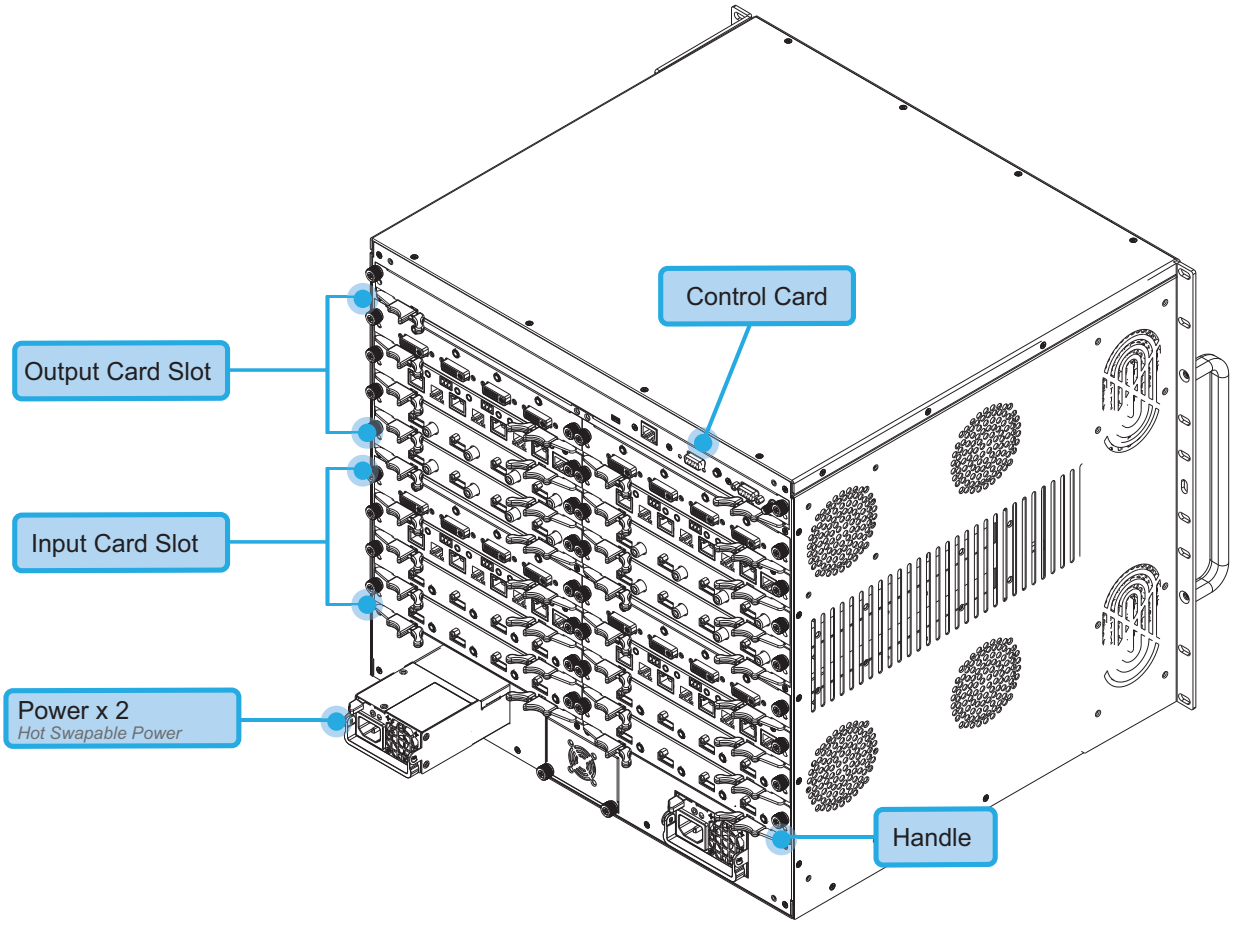


SHINYBOW™
9FL, NO.63, JU GUANG RD., CHUNG HO DIST., NEW TAIPEI CITY (235) TAIWAN
TEL: (+886) 2 2228-8208 FAX:(+886)2 2228-8200

Main Housing

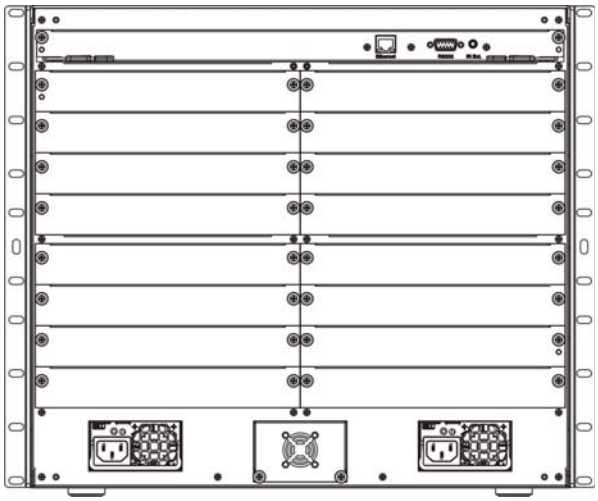


Technicial Specification	
Supported Input Cards	HDMI, DVI, HDBase T
Supported Output Cards	HDMI, DVI, HDBase T
Input and Output Card Securing Mechanism	Handle & Thumbscrew
Input / Output	4 Ports for each card
Control	Front Panel, IR, RS232, Ethernet
Dimension	482x400x396mm
Power Supply	100-240VAC 50/60Hz


HDMI Input Card

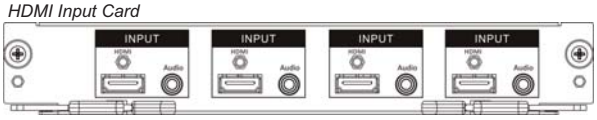


HDMI Output Card

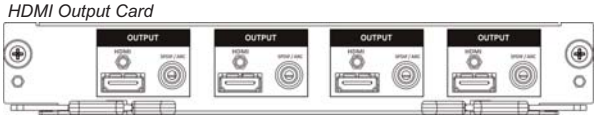


HDBase T Input Card

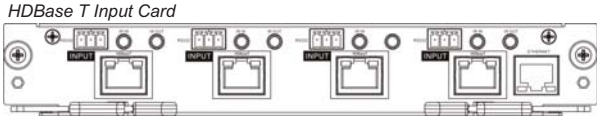


HDBase T Output Card

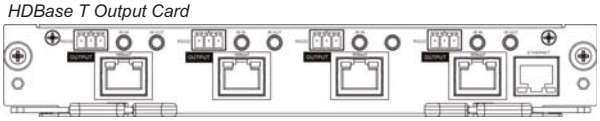

DVI Input Card



DVI Output Card

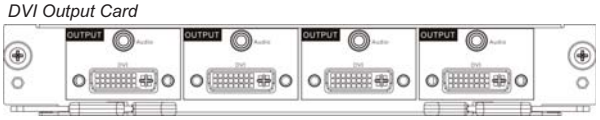

Technicial Specification	
HDCP HDMI Support	HDMI 1.4a, HDCP 2.0
Video Support	HD:480i/ 480p/ 720p/ 1080i/p and up to 4K2K
Audio Support	Multichannel Audio
Video Banthwith	Double Data Rates: 340Mhz, Total 6.75Gbps bandwidth.
HDBase T Cable Distance	100M
HDMI Output Cable Distance	15M
HDBT Control	IR & RS232 bidirectional
Dimension	216x252x33.5mm