SB-6210

VGA • AUDIO CAT5 EXTENDERS

VGA AUDIO CAT5

2x WAY CAT5 TRANSMITTER • 2x WAY CAT5 REPEATER-RECEIVER

SB-6210 VGA+Audio TRANSMITTER+REPEATER

Inputs :
1x VGA-Audio

Outputs :
2x Tx Transmitters Outputs



SB-6210R VGA-Audio RECEIVER+REPEATER (Auto Type)

Inputs :
1x Rx Receiver

Outputs :
2x VGA-Audio
1x Repeater (Loop Output)



03


FEATURES

1. Support VGA-RGBHV & Stereo Audio(AR/AL)
   CAT5 Transmitter and Repeater + Receiver Extende.
2. SB-6210 : Input : 1x VGA+ Audio Output : 2x CAT5(TX)
3. SB-6210R: Input : 1x CAT5(RX) Output : 1x VGA+ Audio+ Loop out :1x CAT5(TX)
4. SB-6210R2 : Input : 1x CAT5(RX) Output : 1x VGA+ Audio+ Loop out : 1x CAT5(TX)
5. Support PC Resolution VGA(640x480) / SVGA(800x600) / XGA(1024x768)
   SXGA(1280x1024) / UXGA(1600x1200).
6. Support HDTV Resolution 480p / 720p / 1080i / 1080p
7. Support one Loop Output port.
8. Extension distance is up to 100m(330ft)
9. Enclosure: wall mount ear included

SPECIFICATIONS

1. Type of CAT5 :	Transmitter(TX) / Repeater + Receiver(RX)
2. Type of Signal :	VGA(RGBHV) & Stereo Audio (AR/AL) connectors
3. Video Bandwidth :	Large Signal Bandwidth: 225Mhz, -3dB
	Small Signal Bandwidth: 450Mhz, -3dB
4. Output Balance Error:	-60dB @50Mhz
5. High Isolation between Amplifier :	80dB@10Mh
6. Audio- in Impedance:	10 Ohms
7. Audio Frequency Response:	20HZ to 20KHz, +/-1db
8. Safety Approvals:	CE, FCC,VCCI
9. Dimension:	3.07" x 2.87" x 1.15"(77. 9mm x 73mm x 29. 1mm)
10. Power Supply:	DC 12V /1A Max
	Use Universal Switch Type 50/60Hz,100~240VAC
11. Net Weight (Unit Only) :	About 0.18kg/0.40 lb

INSTALLING DIAGRAM

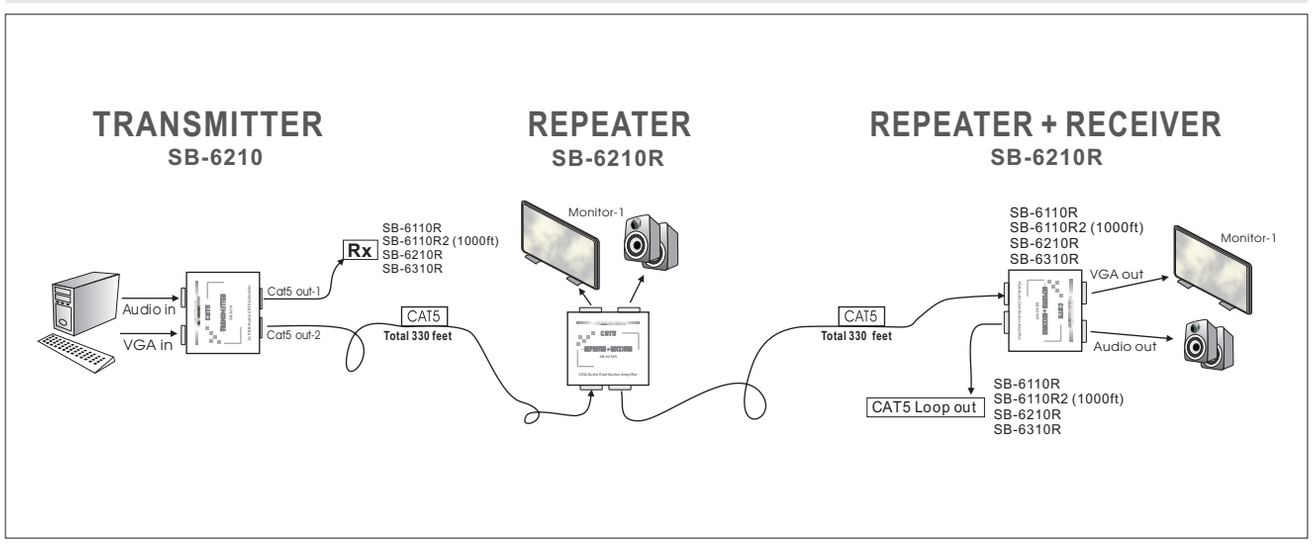

SHINYBOW™ © 2014 Copyrighted All Rights Reserved.