SB-6225
HDMI EXTENDER

Input : 1x HDMI
Output : 1x HDMI

HDMI EXTENDER



02


INTRODUCTION

The SB-6225 is a HDMI extender and will extend the HDMI signals up to100 feet. In its basic configuration, the SB-6225 links two HDMI cables to create a longer extension up to 100 feet.

SB-6225 repeaters can be daisy chained, to create much longer HDMI extensions up to 360 feet. The SB-6225 supports the HDMI 1.3, 1.4a 3D version ,1080p HD resolution and multi-channels digital audio for the best signal quality.

Standard installation involves using HDMI cable-- up to 50 feet long which is connected from HDMI source (DVD player,PS3, set-topbox) to the HDMI input jack on the SB-6225. The another HDMI cable runs from the SB-6225 output jack to the HDTV display -- up to 50 feet away.

SB-6225 HDMI EXTENDER

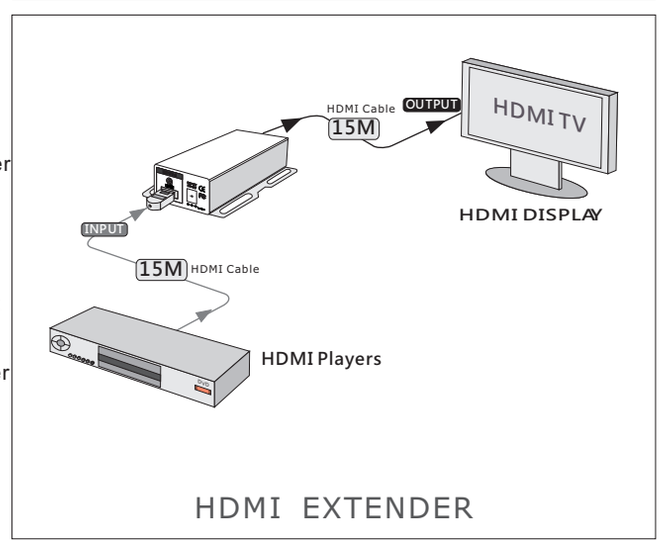

FEATURES

1. HDMI signal Digital Video TMDS /Audio 30M Extender
2. HDMI digital Video/Audio and DVI format and HDCP compliant
3. Support link speeds of up to 3.4 Gbps
4. Support Digital RGB 36bits HDMI TMDS format deep color
5. Extension with high quality video 1920x1200 for 1080p-60Hz
6. Support HD High Definition resolution 408p, 720p 1080i/1080p
7. Support High quality Digital Audio format with DTS-HD Master Audio, Dolby True-HD & Dolby
8. Long distance extend between Blu-Ray HDMI player and HDMI display
9. Easy to install without any adjustment
10. Wall mountable
11. Power DC 12V input with Low power consuming

SPECIFICATIONS

1.Type of Extender:	HDMI signal for distance 30M Extender
2.Signal Support:	Compliant with HDMI 1.4a and DVI 1.1 standards, HDCP Compliant
3.Support HD resolution:	Capable of supporting the following digital video formats in Deep Color Mode at up to 36 bits (12 bits/color): DTV resolutions: 480i, 576i, 480p, 576p, 1080i to 1080p PC resolutions: VGA, SVGA, XGA, SXGA to UXGA
4.Audio Support:	DTS-HD Master Audio, Dolby True-HD & Dolby Digital Plus
5.Safety Approval:	CE, FCC,VCCI,REACH,WEEE,Erp
6.Dimension (LWH):	2.65" x 2.76" x 1" (67.4mm x 70mm x 25mm)
7.Shipping Weight:	0.15 kgs / 0.33 lb
8.Power Supply:	DC 12V /0.42A Max Use Universal Switch Type 50/60Hz, 100~240VAC.

SHINYBOW™ © 2014 Copyrighted All Rights Reserved.