SB-6230

COMPONENT VIDEO CAT5 EXTENDERS

COMPONENT CAT5

Component Video(YPBPR) OVER CAT5 TRANSMITTER • CAT5 REPEATER-Loop Output • CAT5 RECEIVER

SB-6230 2xWAY (Tx) TRANSMITTER

Input :
1x Component Video(YPBPR)

Output :
2x Tx Transmitters
Distribution Amplifier



SB-6230R RECEIVER + REPEATER (Auto Scan Type)

Input :
1x Rx Receiver
1x Repeater(Loop Output)

Output :
1x Component Video(YPBPR)



03


FEATURES

1. Support Component Video (YPBPR) CAT5 Transmitter/Receiver/Repeater
2. Provided by the category5 Cable via RJ-45 connector
3. SB-6230:
   2x Tx-Transmitter via RJ-45 connector
   1x input of Component Video(YPBPR) via 3x RCA connectors
   SB-6230R:
   1x Rx-Receiver via RJ-45 connector
   1x Repeater Loop Output via RJ-45 connector
   1x output of Component Video(YPBPR) via 3x RCA connectors
   2x VR for TINT and BRIGHTNESS adjustment.
4. Support Full HD resolutions 480i.480p.720p.1080i and 1080p.
5. RGB.TINT and BRIGHTNESS adjustment.
6. Extension distance is up to 100M(330FT).
7. Enclosure : Wall mount ear includes.

SPECIFICATIONS

1.	Type of CAT5 :	CAT5 Transmitter(Tx)/Receiver(Rx)/Repeater(Rxx)
2.	Type of Signals :	Component Video (YPBPR) Via 3x RCA connectors
3.	CAT5 connection :	Provided by the category5 Cable via RJ-45 connectors CAT5 Repeater for Loop output to Another CAT5 Receiver
4.	Video Bandwidth :	225MHz(-3dB), 450MHz(-3dB) Large signal bandwidth
5.	Output Balance Error :	-60dB@50MHz
6.	High isolation between Amplifier:	80dB@10MHz
7.	Color proofread :	TINT and BRIGHTNESS adjustmen.
8.	HD resolutions :	480i.480p.720p.1080i and 1080p
9.	CAT5 Extend distance :	100M(330FT) Maximum
10.	Enclosure :	wall mount ear includes
11.	Safety Approvals :	CE, FCC, VCCI
12.	Dimension :	3.07" x 2.87" x 1.14" (78mmx73mmx29mm)
13.	Net Weight(unit only) :	About 0.18kg/0.40 lb
14.	Power Supply :	DC12V / 1A Max Use Universal Switch Type 50/60Hz, 100~240VAC

INSTALLING DIAGRAM

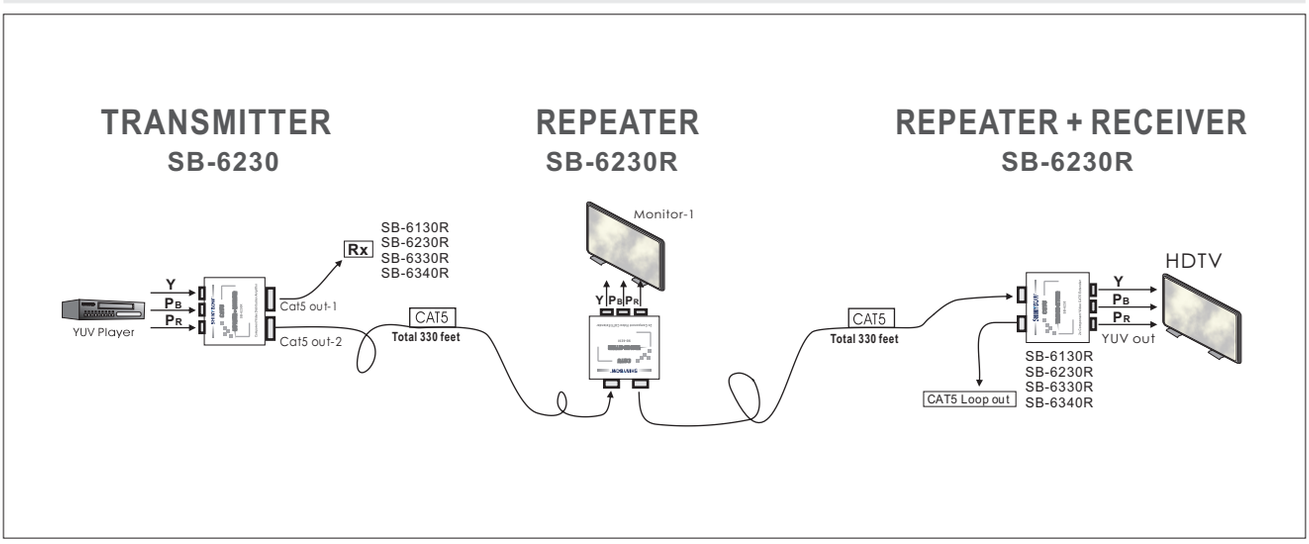

SHINYBOW™ © 2014 Copyrighted All Rights Reserved.