SB-6340

COMPONENT VIDEO CAT5 EXTENDERS

COMPONENT CAT5

4x WAY CAT5 TRANSMITTER • CAT5 REPEATER–Loop Output • CAT5 RECEIVER

SB-6340 4xWAY TRANSMITTER

Input :
1x Component Video(YPBPR)
1x Preview Output

Output :
4x Tx Transmitters
Distribution Amplifier

SB-6340R 2xWAY+RECEIVER+REPEATER(Auto Type)

Input :
1x Rx Receiver
1x Repeater(Loop Output)

Output :
2x Component Video(YPBPR)





03


FEATURES

1. Support Component Video (YPBPR) CAT5 Transmitter/Receiver/Repeater
2. Provided by the category5 Cable via RJ-45 connector
3. SB-6340:
   4x Tx-Transmitter via RJ-45 connector
   1x input of Component Video(YPBPR) via 3x RCA connectors
   1x Preview Output of Component Video(YPBPR) via 3x RCA connectors
   SB-6340R:
   1x Rx-Receiver via RJ-45 connector
   1x Repeater Loop Output via RJ-45 connector
   2x output of Component Video(YPBPR) via 6x RCA connectors
   2x VR for TINT and BRIGHTNESS adjustment.
4. Support Full HD resolutions 480i.480p.720p.1080i and 1080p.
5. RGB.TINT and BRIGHTNESS adjustment.
6. Extension Distance is up to 100M(330FT).
7. Enclosure : Wall mount ear includes

SPECIFICATIONS

1. Type of CAT5 :	4x WAY CAT5 Transmitter(Tx)/Receiver(Rx)/Repeater
2. Type of Signals :	2x WAY Component Video (YPBPR) Via 3x RCA connectors
3. CAT5 connection :	Provided by the category5 Cable via RJ-45 connectors
	CAT5 Repeater for Loop output to Another CAT5 Receiver
4. Video Bandwidth :	225MHz(-3dB), 450MHz(-3dB) Large signal bandwidth
5. Output Balance Error :	-60dB@50MHz
6. High isolation between Amplifier:	80dB@10MHz
7. Color proofread :	TINT and BRIGHTNESS adjustmen.
8. HD resolutions :	480i.480p.720p.1080i and 1080p
9. CAT5 Extend distance :	100M(330FT) Maximum
10. Enclosure :	Ear-Wall mounting attached
11. Safety Approvals :	CE, FCC, VCCI
12. Dimension(WxLxH) :	4.49" x 2.87" x 1.14" (113mmx73mmx29mm)
13. Net Weight(unit only) :	About 0.2kg/0.44 lb
14. Power Supply :	DC12V / 1A Max
	Use Universal Switch Type 50/60Hz, 100~240VAC

INSTALLING DIAGRAM

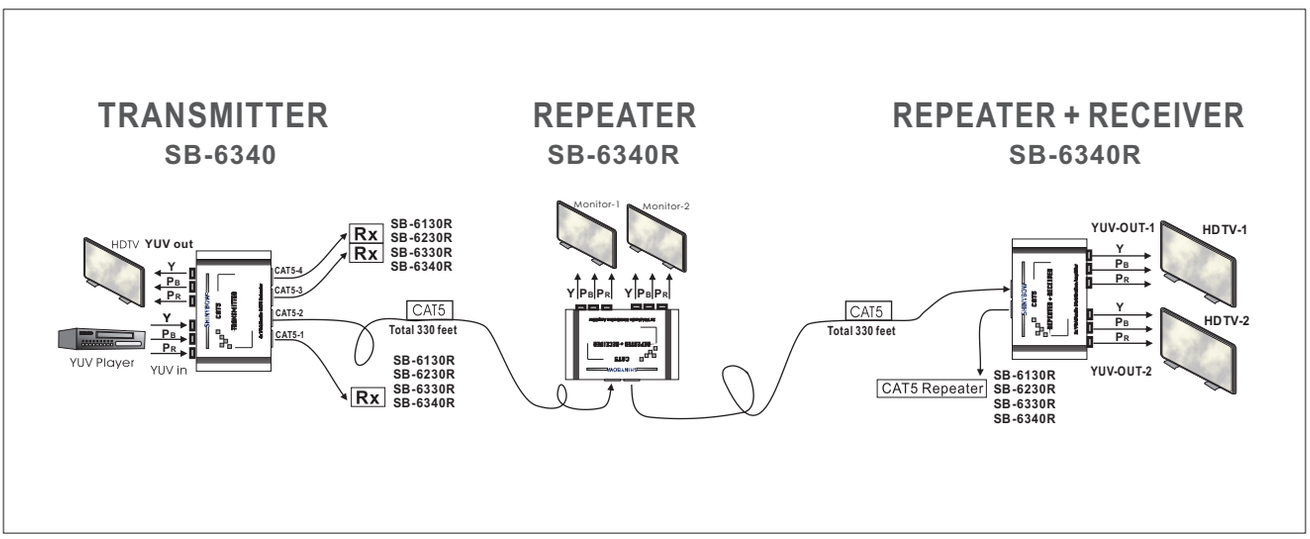

 © 2014 Copyrighted All Rights Reserved.