SB-6345

COMPOSITE VIDEO(DIGITAL) • AUDIO CAT5 EXTENDERS CV/DIGITAL AUDIO CAT5

4x WAY AV OVER CAT5 TRANSMITTER • CAT5 REPEATER-Loop Output • CAT5 RECEIVER

SB-6345 4xWAY(Tx) TRANSMITTER

Input :
1x Composite video or Digital/ Stereo Audio(AR/AL)
1x AV Preview Loop Output

Outputs :
4x (Tx) Transmitters Outputs
4 Way Distribution Amplifier

SB-6345R 2xAV RECEIVER + REPEATER(Auto Type)

Inputs :
1x Rx Receiver
1x Repeater(Loop Output)

Output :
2x Composite video or Digital Audio Stereo Audio(AR/AL) via 6x RCA Connectors





03


FEATURES

1. Support Composite Video or Digital Audio(SPDIF)/Stereo Audio over CAT-5 Transmitter and Repeater + Receiver Extender.
2. SB-6345 : Input :1x Digital Audio(SPDIF) or Composite+ Stereo Audio
   Output: 4x CAT5(TX)
3. SB-6345R : Input : 1x CAT5(RX)
   Output: 2x Digital Audio(SPDIF) or Composite+ Stereo Audio
   Loop out: 1x CAT5(TX)
5. Support HDTV Resolution 480p / 720p / 1080i / 1080p
6. Brightness and TINT adjustment control button on SB-6345R
7. Extension distance is up to 100m(330ft)
8. Enclosure: wall mount ear includes

SPECIFICATIONS

1. Type of CAT5 :	Composite Video or Digital Audio(SPDIF)/Stereo Audio over CAT-5 Transmitter, Repeater and Receiver Extende. Transmitter(TX) / Repeater + Receiver(RX)
2. Type of Signal :	Composite Video or Digital Audio(SPDIF)/Stereo Audio connectors
3. Video Bandwidth :	225Mhz, -3dB large signal bandwidth 450Mhz, -3dB small signal bandwidth
4. Output Balance Error :	-60dB @50Mhz
5. High Isolation:	between Amplifier 80dB@10Mhz
6. Audio- in Impedance :	10 Ohms
7. Audio Frequency Response:	20HZ to 20KHz, +/-1db
8. Safety Approvals :	CE, FCC,VCCI
9. Dimension :	4.45"x2.87 "x1.15"(112.9mm x 73mm x 29.1mm)
10. Power Supply :	DC 12V /1A Max Use Universal Switch Type 50/60Hz, 100~240VAC.
11. Net Weight (Unit Only) :	About 0.2kg/0.44 lb

INSTALLING DIAGRAM

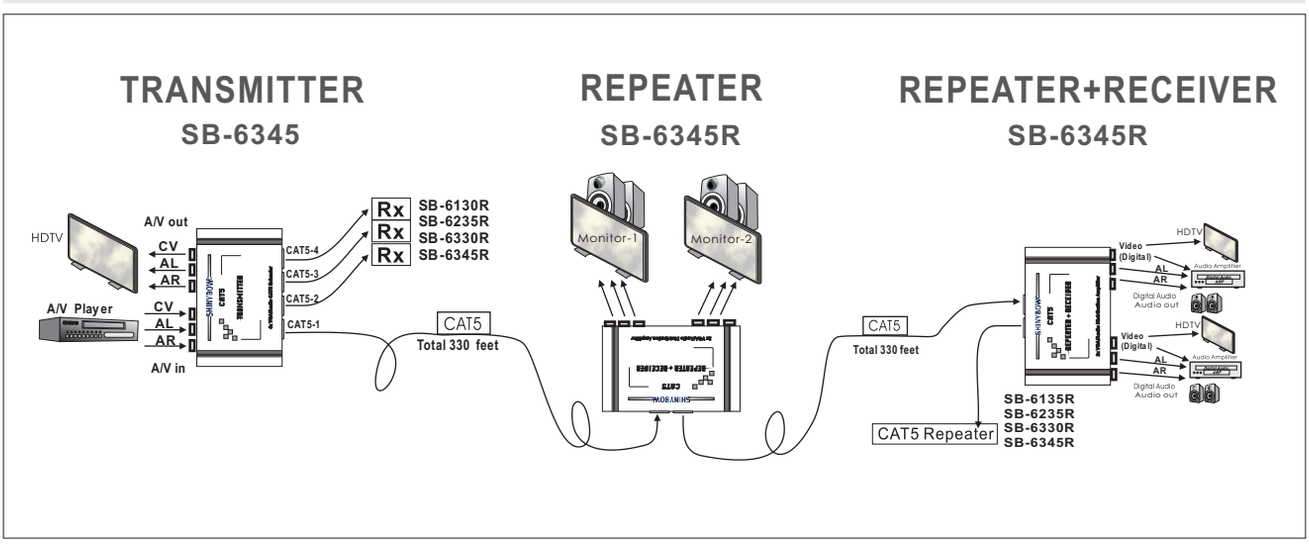

SHINYBOW™ © 2014 Copyrighted All Rights Reserved.