

## Chapter 7 Accessories

### 7.1 Charging Box


The WiFi conferencing system unit charging box CR-WFDS06 is used for charging function. To charge the 6 units at the same time, the power input is connected in series; fast charging, the longest charging time is 3 hours.

#### Charging diagram:



|                             |    |
|-----------------------------|----|
| consumption                 |    |
| Power consumption (standby) | 3W |

#### Charging box series connection diagram

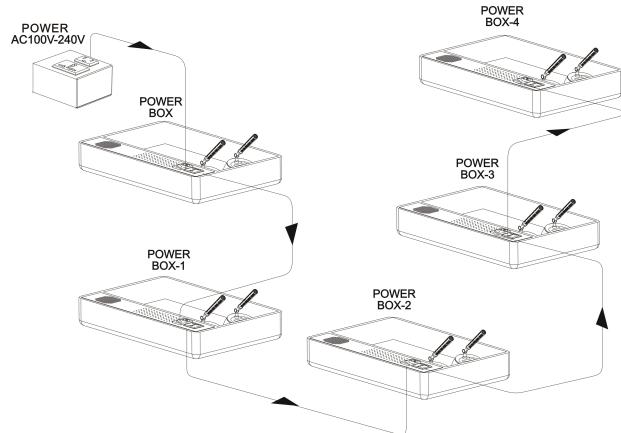

#### Function Characteristics

- ◆ Can charge for the 6 units
- ◆ Universal power supply;
- ◆ The power input has the function of being connected in series;
- ◆ Fast charging: the longest charging time is 3 hours;
- ◆ The charging box also has the function of storage unit.

#### Controls and indicators

- ◆ Turn on/off;
- ◆ Charging status indicator

#### Interconnection

- ◆ Serial interface of mains power supply: the European type, male socket;
- ◆ 24 charging contacts

#### Technical Parameters

|           |                    |
|-----------|--------------------|
| Dimension | 497LX397WX120H(mm) |
| Weight    | About 5kg          |
| Power     | 100W               |

### 7.2 CR-P2 Headphones

#### Function Description



- ◆ It can be used in conference units for monitoring;
- ◆ Used in the conference system can avoid the influences from other people;
- ◆ It comes with 1.5 meters long line;
- ◆ High fidelity sound quality.

#### Technical Parameters

|                       |                 |
|-----------------------|-----------------|
| Unit interface        | 3.5mm mono plug |
| Frequency response    | 30Hz -16KHz     |
| Sensitivity           | 90dB            |
| Signal to noise ratio | > 80dB          |
| Distortion            | < 0.1dB         |
| Impedance             | 32 Ω            |