

aluPAR 56 300 W 230 V WFL

aluPAR 56 | Halogen lamps with parabolic aluminum reflector PAR56, with pin base



Product benefits

- Environment-friendly disposal possible due to lamp disassembly
- Easier handling and reduced transportation costs due to up to 50 % less weight
- Robust lamp design for long lifetime
- Increased safety thanks to integrated lamp fuse according to DIN IEC 60432-2
- Full compatibility with ANSI and CE standards

Product features

- Modular lamp concept
- Light aluminum parabolic reflector and front plate are mechanically connected
- aluPAR 56 and aluPAR 64 available in various wattages for high flexibility



Product datasheet

Technical data

Electrical data

Nominal wattage	300.00 W
Nominal voltage	230 V


Photometrical data

Luminous intensity	10000 cd
Color temperature	2950 K

Light technical data

Beam angle	26/27 °
------------	---------

Dimensions & weight

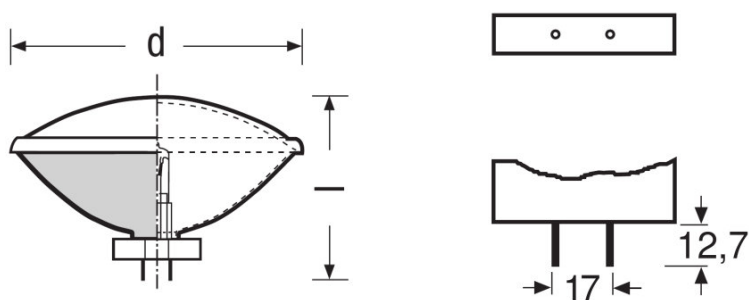

Diameter	177.0 mm
Length	113.0 mm

Lifespan

Lifespan	2000 h
----------	--------

Additional product data

Base (standard designation)	GX16d
Product remark	Beam angle: WFL = wide flood

Capabilities

Burning position	hs30 ¹⁾
------------------	--------------------

¹⁾ Do not tilt perpendicular to the filament

Certificates & standards

Product datasheet

EEL – Energy Label	D
---------------------------	---

Country specific categorizations

Order reference	ALUPAR 56 300W
------------------------	----------------

Country specific information

Product code	METEL code	SEG-No.	STK number	UK Org
4008321108005	OSRALUPAR300WFL	-	-	-
4008321209801	-	-	4736206	-

Product datasheet

Safety advice

To prevent personal injury or damage to property, aluPAR 56 and aluPAR 64 lamps may only be operated in suitable luminaires designed with suitable mechanisms (cover panel etc.) to ensure that in the event of a lamp bursting no parts/shards can escape. Because of the heat produced only heat-resistant lamp connections (holders) may be used. Do not operate near people, or any materials that are flammable, sensitive to heat or affected by drying out. Detailed information is available on request.

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321108005	aluPAR 56 300 W 230 V WFL	Folding carton box 1	153 mm x 142 mm x 153 mm	3.32 dm ³	438.00 g
4008321108012	aluPAR 56 300 W 230 V WFL	Shipping carton box 6	476 mm x 162 mm x 321 mm	24.75 dm ³	2947.00 g
4008321209801	aluPAR 56 300 W 230 V WFL	Folding carton box 1	153 mm x 142 mm x 153 mm	3.32 dm ³	475.00 g
4008321209818	aluPAR 56 300 W 230 V WFL	Shipping carton box 6	476 mm x 162 mm x 321 mm	24.75 dm ³	2993.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

References / Links

Further information on the aluPAR lamps can be found in the brochure entitled:
"In a class of their own. OSRAM PAR lamps for entertainment lighting: Lighter, brighter, cooler."

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.
