

CLASSIC 500

PROJECTORS

CLASSIC 500




FEATURES

- Variable beam projector, from spot to flood
- Focus adjustment with sliding movement
- Available with PC or Fresnel lens
- Sliding top cover for lamp replacement
- Aluminium and steel body with cooling fins

LP40 300W
LP47 500W

230V
50/60 Hz

Gx 9.5
LcL 46.5 mm

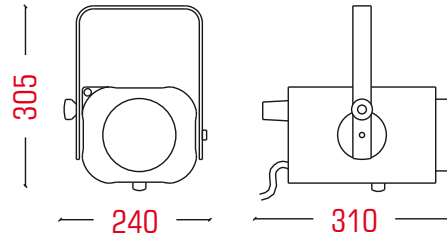

SPOT 500 PC 3,2

SPOT 500 FR 3,0

MODELS

CLASSIC 500 PC (Cod. SE.50.PC)
Anti-halo Ø 120mm lens • Black colour

CLASSIC 500 FRESNEL (Cod. SE.50.FR)
Fresnel Ø 120mm lens • Black colour

TECHNICAL

- Lens diameter 120mm
- Aluminium reflector diameter 60mm
- Metal filter included
- Reverse yoke for stand mounting
- Single side knob tilt-lock
- 1 meter cable with cable clamp

ACCESSORY

INCLUDED
SE.50.FF

SE.50.BARN

CLASSIC 500

ADMISSIBLE LAMPS

- 300W: CP81 3200K 180hrs
- 300W: M38 2900K 2000hrs
- 500W: T18 3050K 400hrs
- 500W: CP82 3200K 180hrs

PHOTOMETRIC

CLASSIC 500

TEST AT 230V WITH 500W LAMP - PC LENS

11°	DIST	2.5	5	7.5	10	12.5	15
	LUX	4800	1200	533	300	192	133
	Ø(m)	0.48	0.96	1.44	1.92	2.40	2.88

44°	DIST	2.5	5	7.5	10	12.5	15
	LUX	960	240	107	60	38	27
	Ø(m)	2.02	4.04	6.06	8.08	10.1	12.1

TEST AT 230V WITH 500W LAMP - FRESNEL LENS

10°	DIST	2.5	5	7.5	10	12.5	15
	LUX	5600	1400	622	350	224	156
	Ø(m)	0.44	0.88	1.32	1.76	2.20	2.64

42°	DIST	2.5	5	7.5	10	12.5	15
	LUX	1400	350	156	88	56	39
	Ø(m)	1.93	3.85	5.78	7.70	9.63	11.5

CLASSIC 1000

PROJECTORS

CLASSIC 1000




FEATURES

- Variable beam projector, from spot to flood
- Focus adjustment with sliding movement
- Available with PC or Fresnel lens
- Hinged base for easy lamp replacement
- Aluminium and steel body with cooling fins

LP42 650W
LP43 1000W

230V
50/60 Hz

Gx 9.5
LcL 55 mm

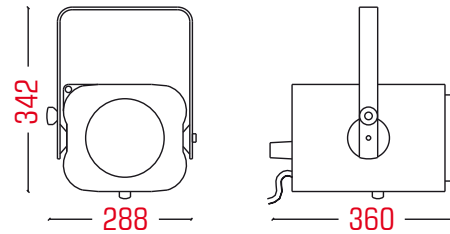

SPOT 1000 PC 5,6

SPOT 1000 FR 5,3

MODELS

CLASSIC 1000 PC (Cod. SE.100.PC)
Anti-halo Ø 150mm lens • Black colour

CLASSIC 1000 FRESNEL (Cod. SE.100.FR)
Fresnel Ø 150mm lens • Black colour

TECHNICAL

- Lens diameter 150mm
- Aluminium reflector diameter 100mm
- Metal filter included
- Reverse yoke for stand mounting
- 1 meter cable with cable clamp
- Single side knob tilt-lock

ACCESSORY

INCLUDED
SE.100.FF

SE.100.BARN

CLASSIC 1000

ADMISSIBLE LAMPS

- 650W: T21 3050K 900hrs
- 650W: CP67 3200K 400hrs
- 1000W: T19 3050K 750hrs
- 1000W: CP70 3200K 200hrs

PHOTOMETRIC

CLASSIC 1000

TEST AT 230V WITH 1000W LAMP - PC LENS

11°	DIST	2.5	5	7.5	10	12.5	15
	LUX	13850	3460	1538	865	554	384
	Ø(m)	0.48	0.96	1.44	1.92	2.40	2.88

57°	DIST	2.5	5	7.5	10	12.5	15
	LUX	1720	430	191	108	69	48
	Ø(m)	2.39	4.77	7.16	9.54	11.9	14.3

TEST AT 230V WITH 1000W LAMP - FRESNEL LENS

11°	DIST	2.5	5	7.5	10	12.5	15
	LUX	14080	3520	1564	880	563	391
	Ø(m)	0.48	0.96	1.44	1.92	2.40	2.88

50°	DIST	2.5	5	7.5	10	12.5	15
	LUX	2200	550	244	138	88	61
	Ø(m)	2.33	4.66	6.99	9.32	11.65	13.9